

UNCLASSIFIED

Nationaal Lucht- en Ruimtevaartlaboratorium

National Aerospace Laboratory NLR



Executive summary

Flight Dynamics Modeling For A Small-Scale Flybarless Helicopter UAV

Problem area

We present a UAV helicopter flight dynamics nonlinear model for a flybarless articulated Pitch-Lag-Flap (P-L-F) main rotor with rigid Blades.

Description of work

The model includes the main rotor, tail rotors and the fuselage. Additionally the paper reviews all assumptions made in deriving the model, i.e. structural, aerodynamics, and dynamical simplifications.

Results and conclusions

The model has been compared with an equivalent FLIGHTLAB nonlinear model. Simulation results show that the match between this model and FLIGHTLAB is very good for static (trim) conditions, is good to very good for dynamic conditions from hover to medium speed flight $u = 5$ m/sec, is fair to

good for dynamic conditions at high speed $u = 10$ m/sec, and except for the yaw channel is also good in the VRS.

Applicability

The model is applicable for high bandwidth control specifications, for both Clock-Wise (CW) and Counter-Clock-Wise (CCW) main rotor rotation, and valid for a range of flight conditions including autorotation and the Vortex-Ring-State (VRS). Hence this model could potentially be used to simulate and investigate the flight dynamics of a flybarless small-scale UAV helicopter, including in autorotation and VRS conditions. Future work will focus on the development of linear and nonlinear control schemes, based on an adapted version of this model, to obtain optimal helicopter flight trajectories.

Report no.

NLR-TP-2011-230

Author(s)

S. Taamallah

Report classification

UNCLASSIFIED

Date

July 2011

Knowledge area(s)

Helikoptertechnologie

Descriptor(s)

Unmanned Aerial Vehicle (UAV)
Helicopter flight dynamics

This report is based on a presentation held at the AIAA Atmospheric Flight Mechanics Conference, Portland, Oregon, USA, 8 - 11 August 2011.

UNCLASSIFIED

Nationaal Lucht- en Ruimtevaartlaboratorium, National Aerospace Laboratory NLR

Anthony Fokkerweg 2, 1059 CM Amsterdam,
P.O. Box 90502, 1006 BM Amsterdam, The Netherlands
Telephone +31 20 511 31 13, Fax +31 20 511 32 10, Web site: www.nlr.nl



NLR-TP-2011-230

Flight Dynamics Modeling For A Small-Scale Flybarless Helicopter UAV




S. Taamallah

This report is based on a presentation held at the AIAA Atmospheric Flight Mechanics Conference, Portland, Oregon, USA, 8 - 11 August 2011.

The contents of this report may be cited on condition that full credit is given to NLR and the authors.

Customer	National Aerospace Laboratory NLR
Contract number	----
Owner	National Aerospace Laboratory NLR
Division NLR	Aerospace Systems and Applications
Distribution	Unlimited
Classification of title	Unclassified
	July 2011

Approved by:

Author	Reviewer	Managing department
		

Contents

Nomenclature	1
I Introduction	1
I.A Background	2
I.B Small-Scale Helicopter Dynamics: Review of Previous Work	2
I.C General-Purpose Helicopter Simulation Codes	2
I.D Our Research Model	3
II The Helicopter Main Rotor	4
III Rigid Body Equations of Motion	5
III.A Assumptions	5
III.B Modeling	6
IV Main Rotor Modeling	6
IV.A Assumptions	6
IV.B Modeling	7
V Tail Rotor Modeling	7
V.A Assumptions	7
V.B Modeling	8
VI Simulation Results	8
VI.A Trim Results	8
VI.B Dynamic Results	9
VII Conclusion	11
Appendix A Simulation Results	12
Appendix B Physical Parameters	19
References	21



This page is intentionally left blank.

Flight Dynamics Modeling For A Small-Scale Flybarless Helicopter UAV

Skander Taamallah^{*†}

National Aerospace Laboratory (NLR), 1059CM Amsterdam, The Netherlands

We present a UAV helicopter flight dynamics nonlinear model for a flybarless articulated Pitch-Lag-Flap (P-L-F) main rotor with rigid blades, applicable for high bandwidth control specifications, for both ClockWise (CW) and Counter-ClockWise (CCW) main rotor rotation, and valid for a range of flight conditions including autorotation and the Vortex-Ring-State (VRS). The model includes the main rotor, tail rotor, and the fuselage. Additionally, the paper reviews all assumptions made in deriving the model, i.e. structural, aerodynamics, and dynamical simplifications. Simulation results show that the match between this model and an equivalent nonlinear FLIGHTLAB[®] model is very good for static (trim) conditions, is good for dynamic conditions from hover to medium speed flight, and is fair to good for dynamic conditions at high speed. Hence, this model could potentially be used to simulate and investigate the flight dynamics of a flybarless UAV helicopter, including in autorotation and VRS conditions.

Nomenclature

ϕ	Bank angle (roll angle)
θ	Inclination angle (pitch angle, or elevation)
ψ	Azimuth angle (yaw angle, heading)
$\mathbf{V}_{k,G}$	Kinematic velocity of the vehicle center of mass
$u_k^b = u$	x component of $\mathbf{V}_{k,G}$ on body frame F_b
$v_k^b = v$	y component of $\mathbf{V}_{k,G}$ on body frame F_b
$w_k^b = w$	z component of $\mathbf{V}_{k,G}$ on body frame F_b (positive down)
$p_k^b = p$	Roll velocity (roll rate) of the vehicle relative to the earth
$q_k^b = q$	Pitch velocity (pitch rate) of the vehicle relative to the earth
$r_k^b = r$	Yaw velocity (yaw rate) of the vehicle relative to the earth

I. Introduction

In the past twenty years, scientific progress related to sensors technology and computational hardware has allowed for sustained research in the field of robotics. In particular when considering flying robots, the availability of increasingly reliable, high performance, and miniaturized sensors, combined with advances in computing power on miniaturized hardware, has yielded impressive developments in the area of Unmanned Aerial Vehicles (UAVs)^a. These unmanned vehicles have been developed for both civilian and military missions^b, with their *raison d'être* stemming from the need for (real-time) information^c. Further, UAV

^{*}R&D Engineer, Avionics Systems Department, National Aerospace Laboratory (NLR), 1059CM Amsterdam, The Netherlands.

[†]Ph.D. Student, Delft Center for Systems and Control (DCSC), Faculty of Mechanical, Maritime and Materials Engineering, Delft University of Technology, 2628CD Delft, The Netherlands.

^aAlthough industry and the regulators have now adopted Unmanned Aerial System (UAS) as the preferred term for Unmanned Aircraft, as UAS encompasses all aspects of deploying these vehicles and not just the platform itself.

^bUAVs have typically been associated with the so-called *DDD* tasks:¹ Dull e.g. long duration, Dirty e.g. sampling for hazardous materials, and Dangerous e.g. extreme exposure to hostile action.

^cSpanning a broad spectrum, i.e. visual, electromagnetic, physical, nuclear, biological, chemical, or meteorological information.

deployment and recovery from unprepared or confined sites may often be necessary, such as when operating from or above urban and natural canyons, forests, or naval ships. Hence, for those situations a helicopter UAV, capable of flying in and out of such restricted areas, would represent a particularly attractive solution.

I.A. Background

A helicopter is a complex system, and understanding helicopter flight has been a continuous endeavor. Certainly helicopter nonlinear flight dynamics modeling has seen considerable development over the past forty years. We refer here to some of the foundational contributions^d of the 1970s in Ref. 2–5, of the 1980s in Ref. 6–16, of the 1990s in Ref. 17–23, and for the last decade in Ref. 24–27. For a single main rotor, and briefly summarized, helicopter flight dynamics includes the rigid-body responses combined with higher-frequency modes.²⁸ These higher-frequency modes are generated by the main rotor system and its interaction with the fuselage and other vehicle components. For flight mechanics and control development purposes, the three most important aspects of these higher order rotor dynamics are blade flapping which allows the blade to move in a plane containing the blade and the shaft, blade lead-lag which allows the blade to move in the plane of rotation, and rotor inflow which is the flow field induced by the rotor at the rotor disk. On these subjects, an extensive discussion covering the various levels of required model complexity may be found in Ref. 15, 22, 29.

In Ref. 15 a general definition of helicopter model sophistication was formulated, to conveniently describe helicopter model complexity. This definition, slightly adapted here for R/C helicopters, is given hereunder

- **Dynamics.** The level of detail in representing the dynamics of the helicopter. This factor determines the validity of the model in terms of the frequency range of applicability, and in the sequel is divided into two sub-categories: (i) low/medium model bandwidths are such that the blade flap/lag dynamics and inflow dynamics are either omitted or elementary modeled, and (ii) high model bandwidths referring to models which do account, in a relatively detailed way, for (most of) those effects.^{30, 31}
- **Validity.** The level of sophistication in calculating the helicopter forces, moments, and inflow. This factor determines the domain of validity in the flight envelope and is also divided into two sub-categories: (i) conventional flight as in hover and low speed maneuvers, and (ii) aerobatic/aggressive maneuvers including steep descent flight conditions.

I.B. Small-Scale Helicopter Dynamics: Review of Previous Work

In the past fifteen to twenty years, there has been considerable worldwide activity in research^e related to automatic flight of small-scale helicopter UAVs. For example, for low to medium bandwidth systems, the usual robustness-performance trade-off has undeniably allowed for quick and successful demonstration (or simulation) of automatic helicopter flight for hover and low speed conditions, see Ref. 32–42. Further, for high bandwidth system specifications, at still conventional flight conditions, model-based automatic flight results can be found in Ref. 43–56, and non-model^f-based examples have been documented in Ref. 57–60, while vision based systems have been reported in Ref. 61–66. Additionally, high bandwidth system specifications for aggressive/aerobatic flight conditions have also been successfully demonstrated, with the model-based approaches described in Ref. 67–69, and non-model-based ones given in Ref. 70–72. This said, and to the best of our knowledge, none of the previously mentioned high bandwidth model-based approaches are valid for high sink rates or steep descent flight conditions, such as the VRS or autorotation.⁷³

I.C. General-Purpose Helicopter Simulation Codes

Several general-purpose helicopter simulation codes exist, often based on a multi-body dynamics approach. These codes have been extensively used, by industry and academia worldwide, such as GenHel,⁷ CAMRAD,⁷⁴

^dWithout considering aspects related to Inverse Simulation, Higher Harmonic Control (HHC) or Individual Blade Control (IBC).

^eIn the sequel, due to time and space constraints, we only review contributions in the field of helicopter UAV modeling for control synthesis, excluding thus system identification, navigation, and control aspects.

^fWe refer here to models which are generally not derived from first principles, such as in the areas of machine learning, evolutionary, and genetic algorithms.

FLIGHTLAB,²⁶ and HOST²⁴ to name a few. These simulation codes, with a proven track record stretching back two or three decades, are indeed very reliable and highly accurate. They represent excellent tools for among others helicopter flight simulation purposes, operational analysis, crew training, flying qualities investigations, auto-pilot design, load prediction, and vibrations analysis. For all that, these simulation codes have some disadvantages. First, these codes may be seen as third-party black-box models, since often one does not have complete access to their detailed analytical expressions, or corresponding software algorithms and implementations. Second, even when analytical expressions may be available, the multi-body model structure adds a huge amount of detail, resulting in very high order dynamical systems, effectively inhibiting any further manipulation of the analytical expressions. Third, for the calculation of blade and main rotor forces, the integration of the elemental lift and drag forces is often not solvable analytically, due to the complex nature of the expressions, but rather through numerical algorithms, which in turn precludes any use of closed-form expressions based models. Hence, all these reasons restrict the range of control techniques that could be used, when the end goal is to design a helicopter auto-pilot. Here we did not mention the use of lookup tables as a potential issue. Typically, tabular data provide a representation of vehicle propulsion, aerodynamic, or mass properties. Often these lookup tables are obtained as the result of experimental tests. Sometimes, this tabular data formulation is necessary simply because there was not enough knowledge to permit an analytical representation of the laws of physics. Nonetheless, these tables may be approximated by closed form expressions, through careful selection of either high-order polynomial expansions,⁷⁵ or (cubic) B-Splines.⁷⁶

Now either white-box^g or black-box models can be used for auto-pilot design, through judicious model linearizations, provided linear control techniques are employed. For example, these latter include classical methods,^{77,78} optimal methods,^{79–82} robust methods,^{83,84} or receding horizon methods^{85–87} methods, that all may be applied in a gain scheduling⁸⁸ or (quasi-) Linear-Parameter-Varying (LPV) framework.⁸⁹ On the other hand, black-box models cannot be used for auto-pilot design when nonlinear control techniques, that explicitly require closed-form modeling, are sought. Hence, the availability of our model and its corresponding analytical expressions, will allow us to research and evaluate several nonlinear control techniques. Notably, control methods that include (i) feedback linearization,^{90,91} (ii) Lyapunov based methods such as sliding mode control,^{92–94} or backstepping,^{95,96} (iii) differential flatness,^{97–100} (iv) State-Dependent Riccati Equation (SDRE),^{101–105} or (v) the $\theta - D$ approach¹⁰⁶ may all be investigated in the future, through the use of a modified version of our helicopter nonlinear model.

I.D. Our Research Model

The purpose of our work is to present a small-scale helicopter UAV flight dynamics model for a flybarless, i.e. without a Bell-Hiller stabilizing bar, articulated Pitch-Lag-Flap (P-L-F) main rotor with rigid blades, applicable for high bandwidth control specifications, for both ClockWise (CW) and Counter-ClockWise (CCW) main rotor rotation, and valid for a range of flight conditions including the Vortex-Ring-State (VRS). Now due to space constraints, we present here the model from a common qualitative approach. The complete helicopter analytical expressions can be found in Ref. 107–109.

The nonlinear dynamic model includes the twelve-states rigid body equations of motion, the four-states/blade flap/lag angles and flap/lag rotational velocities, the three-states dynamic inflow, and the single-state main rotor Revolutions Per Minute (RPM). Thus, for a two-bladed helicopter main rotor, the full model includes twenty-four-states, while for a three-bladed helicopter main rotor, the full model includes twenty-eight-states. Besides, the model accommodates for an off-axis response correction factor, for flight in the VRS, and for deterministic^h wind linear velocity inputs. Static ground effect has been accounted for by a correction factor applied to the non-dimensional total velocity at the rotor disk center. Further, computation of main rotor forces is done numerically through Gaussian quadrature integration, using a low order Legendre polynomial scheme. Additionally, the fuselage model is based upon aerodynamic lift and drag coefficients, which are tabulated as a function of airflow angle of attack and sideslip angles. These lookup tables are derived from a scaled-down full-size helicopter fuselage aerodynamic model. The horizontal and vertical tails have currently not been included, but they will be added at a later stage. For the tail rotor, this

^gA model where all necessary information is available, e.g. based on available first principles expressions.

^hStochastic atmospheric turbulence will be added at a later stage.

latter has been modeled as a Bailey type rotor. Finally the paper reviews all assumptions made in deriving the model, i.e. structural, aerodynamics, and dynamical simplifications, which are valid for stability and control investigations of helicopters up to an advance ratio limitⁱ of about 0.3.^{5,110,111}

The remainder of the paper is organized as follows. In Section II, an introduction on helicopter main rotor (aero)dynamics is presented. In Section III, the rigid body equations of motion are reviewed. In Sections IV and V, the main and tail rotor models are discussed. In Section VI, simulation results are analyzed. Finally, conclusions and future directions are presented in Section VII.

II. The Helicopter Main Rotor

Since the early 1950s, it is known that including flapping dynamics in a helicopter flight model could produce limitations in rate and attitude feedback gains.¹¹² In fact blade flapping motion has three natural modes, i.e. coning, advancing, and regressing. The regressing flapping mode is the most relevant when considering the effect of rotor dynamics on handling characteristics, it is the lowest frequency mode of the three, and it has a tendency to couple into the fuselage modes.^{111,113–118} Additionally, for helicopter directional axis control, blade lead-lag dynamics ought to be considered for control system design.¹¹⁹ In particular it is well known that blade lead-lag produces increased phase lag at high frequency, in the same frequency range where flapping effects occur,¹¹⁶ and that control rate gains are primarily limited by lead-lag-body coupling.^{116,120}

Regarding the induced rotor flow, this latter contributes to the local blade incidence and dynamic pressure. This induced flow plays a key role in destabilizing the flapping mode; this may for example result in a large initial overshoot in the vertical acceleration response to an abrupt input in the collective pitch.^{116,121} In fact for full-size helicopters, frequencies of inflow dynamics are of the same order of magnitude as those of rotor blade flapping and lead-lag modes. Hence inflow dynamics can have a significant influence on the performance of a main rotor system.^{116,121} Inflow models can be divided into two categories, static and dynamic models. For low-bandwidth maneuvering applications, such as trim calculations or flying-qualities investigations, the dynamic effects of the interaction of the airmass with the airframe and rotor may be expected to be negligible, therefore static inflow models may be acceptable.¹²² But for high bandwidth applications, dynamic interactions between the inflow dynamics and the blade motion must be considered. Conjointly, dynamic inflow models can be divided into two^j unsteady categories: the Pitt-Peters dynamic inflow,^{126–129} and the Peters-He finite-state wake model.^{130–132} The finite-state wake model is a more comprehensive theory than dynamic inflow, not limited in harmonics and allowing to account for non linear radial inflow distributions, while the dynamic inflow model can be thought of as a special case of the finite-state wake model, with only three inflow expansion terms.^{131,132} The sophisticated finite-state model is attractive when rotor vibration and aeroelasticity need to be analyzed.¹³³

On the subject of wake distortion which is the primary source of the so-called off-axis response problem, observed in maneuvering flight at hover and low speed,^{134,135} several modeling approaches have been researched over the years. For the interested reader, we refer here to the aerodynamic interaction between helicopter rotor and body in Ref. 136, the inclusion of a virtual inertia effect associated with the swirl in the rotor wake in Ref. 137, the introduction of an aerodynamic phase lag in flapping and dynamic inflow equations, with the use of system identification techniques in Ref. 138–142, the extended momentum model approach in Ref. 134,143,144, the free wake modeling in Ref. 145–147, the dynamic vortex ring modeling in Ref. 148–150, the augmented Pitt-Peters dynamic inflow model in Ref. 135,151–155, and the augmented Peters-He finite state inflow model in Ref. 154–157.

Concerning ground effects, these can be divided into three domains, namely static ground effect, dynamic ground effect, and the ground vortex. Static ground effect, i.e. when the ground surface is not subject to movements, can be accounted for by a correction factor applied to the non-dimensional total velocity at the rotor disk center.¹⁵⁸ Dynamic ground effect takes place when for instance a helicopter is hovering above a

ⁱThe flight envelope of small-scale helicopters is well within this limit.

^jAlbeit recent advances in computing power and methodology have made it foreseeable to add a third category, namely that of detailed free-wake models that may be run in real-time for flight dynamics applications.^{123–125}

heaving, rolling or pitching surface (such as a ship deck), resulting in unsteady aerodynamics effects at the rotor.^{159,160} Additional complications may arise in the eventuality of having a helicopter either (i) hover above an inclined ground plane or ship deck, in which case not only the magnitude but also the distribution of rotor induced velocity changes,^{161,162} or (ii) partially hover above a building top or a ship deck.¹⁶³ On the subject of ground vortex, this phenomenon is produced by the interaction of the rotor downwash, the ground, and the velocity of translation.¹⁶⁴ The earliest identification of the horseshoe ground vortex occurred in Ref. 165, followed by theoretical investigations in Ref. 166–168, and experimental results in Ref. 169–171. The consequences of such a ground vortex is that characteristics as trim control requirements, effectiveness of the tail rotor, and engine performance^k may all be markedly changed by the proximity of a ground vortex.¹⁷⁰

We conclude this section by briefly addressing the issue of atmospheric disturbances, since the main rotor is sensitive to these effects. Indeed wind and wind gusts, induced by atmospheric variations, or by local terrain or man-made structures, will change the aerodynamic conditions at the rotor, hence impact rotor blade lift and drag.^{68,172} Atmospheric disturbances may be added as additive perturbations, and these come in three different forms, i.e. constant linear wind velocity, stochastic linear turbulence velocity, and stochastic rotational turbulence velocity. Linear disturbances will affect the vehicle aerodynamic velocity, while rotational turbulence velocities will affect vehicle body roll, pitch, and yaw rates. A low altitude turbulence survey with a huge amount of data can be found in Ref. 173, while Ref. 174 presents an early description of nonstationary^l low altitude atmospheric turbulence. Additionally, two atmospheric models have extensively been used in the aerospace community. The first one is the *von Karman* model,¹⁷⁵ where an isotropic^m turbulence model was assumed, which was validated by experimental measurements of low altitude in Ref. 176. The second one is the *Dryden* atmospheric model.¹⁷⁷ The difference between the two lies basically in a small variation of the high frequency content.¹⁷⁸ The *Dryden* model is most frequently used, owing to its greater simplicity of implementation, i.e. by passing white noise through linear filters.¹⁷⁹ On the other hand, FLIGHTLAB users will be more familiar with the *von Karman* spectrum, since this model with extensions from Ref. 180,181 generates the additive vertical turbulence velocity. Further, the literature on transient and steady-state turbulence (gusts) modeling, and corresponding aircraft and helicopter response, is extensive to say the least. For the interested reader, we refer here to fixed-wing design and response to gusts in Ref. 182–187, while for the rotary-wing case an excellent *tour d'horizon* is provided in Ref. 188–190. Furthermore, the effect of deterministic gusts can be found in Ref. 191–193, analysis of flapping response to gusts in Ref. 194, coupled flap-torsion dynamics to stochastic vertical turbulence in Ref. 195–197, flap-lag dynamics to stochastic vertical turbulence in hover in Ref. 198,199, flap-lag dynamics to stochastic horizontal turbulence in hover in Ref. 200, and in forward flight in Ref. 201, and blade-fixedⁿ atmospheric turbulence in Ref. 181,202–206.

III. Rigid Body Equations of Motion

III.A. Assumptions

- The vehicle has a longitudinal plane of symmetry, and has constant mass, inertia, and Center of Gravity (CG) position, hence fuel consumption and/or payload pickup/release are neglected. The vehicle is also a rigid system, i.e. it does not contain any flexible structures, hence the time derivative of the inertia matrix is zero. Further variations of helicopter CG locations due to main rotor blades position are neglected.
- The vehicle height above ground is very small compared to the earth radius, implying a gravitation independent of height and thus constant. Additionally the center of mass and CG are identical for a constant gravity field.
- The earth is assumed fixed and flat. There is then no longer a distinction between the directions of

^kIn case of engine inlet ingestion of its own exhaust.¹⁶⁹

^lA stochastic process whose probability distribution changes when shifted in time or space.

^mStatistical properties invariant with respect to direction.

ⁿBody-fixed atmospheric turbulence refers to the turbulence experienced by a point fixed on a non-rotating vehicle component such as the vehicles CG, while blade-fixed atmospheric turbulence refers to the turbulence experienced by a component of a rotating rotor blade.²⁰² Indeed the atmospheric turbulence velocities seen by non-rotating vehicle components and rotating blades may be substantially different.

gravitational force and the force of gravity, hence the external force becomes the force of gravity^o. Gravity is also a function of latitude, for all practical purpose we will consider the medium latitudes of 52°.

- Finally, we neglect the effect of buoyancy or Archimedes force, which is negligible with respect to all other forces.

III.B. Modeling

Classical Newtonian mechanics and the fundamental relationship of kinematics provide us with the standard twelve-state rigid body equations of motion. The model is detailed in Ref. 107, following notations of Ref. 207.

IV. Main Rotor Modeling

IV.A. Assumptions

Structural Simplifications

- Rotor shaft forward and lateral tilt-angles are zero. The blade has zero twist, constant chord, zero sweep, constant thickness ratio, and a uniform mass distribution.
- Rigid rotor blade in bending. Neglecting higher modes (harmonics), since higher modes are only pronounced at high speed.^{22, 209} Further, blade torsion is neglected since small-scale helicopter blades are generally relatively stiff.
- Rotor inertia inboard of the flap hinge is assumed small and thus neglected.

Aerodynamics Simplifications

- Vehicle flies at a low altitude, hence neglecting air density and temperature variations. Blade element theory^p is used to compute rotor lift and drag forces. Radial flow along blade span is ignored. Pitch, lag, and flap angles are assumed to be small.
- Momentum theory^q is used to compute the uniform inflow component.
- Compressibility effects are disregarded, which is a reasonable assumption considering small-scale helicopter flight characteristics. Viscous flow effects are also disregarded, which is a valid assumption for low angle of attacks and un-separated flow.^{212, 213}
- Aerodynamic interference effects between the main rotor and other helicopter modules, e.g. fuselage or tail rotor, are neglected.

Dynamical Simplifications

- Dynamic twist^r is neglected. Hence blade CG is assumed to be located on the blade section quarter chord line.
- Unsteady (frequency dependent) effect for time-dependent development of blade lift and pitching moment, due to changes in local incidence are ignored. For example dynamic stall, due to rapid pitch changes, is ignored.
- A balanced rotor is assumed. In general most of the inertial terms, contributing to main rotor moments, vanish^s when integrated around 2π azimuth.

^oFor further details on the geoid earth and gravity see Ref. 207, 208.

^pCalculates the forces on the blade due to its motion through the air. It is assumed that each blade section acts as a 2-D airfoil to produce aerodynamic forces, with the influence of the wake contained in an induced angle of attack at the blade section.²¹⁰

^qStates that the total force acting on a control volume is equal to the rate of change of momentum, i.e. mass flow entering and leaving this control volume.^{210, 211}

^rAny offset in blade chordwise CG or aerodynamic center position will result in a coupling of the flap and torsion Degrees Of Freedom (DOF) in blade elastic modes.²²

^sThese terms should be retained when evaluating rotor out-of-balance loads.⁴

IV.B. Modeling

The model uses the rigid blade coupled flap-lag equations of motion for a Pitch-Lag-Flap (P-L-F) hinges sequence. This hinge arrangement is indeed much more useful for modeling the rotor dynamics of small-scale flybarless R/C helicopters. The equations have been obtained through the Lagrangian method,²¹⁴ and are reported in Ref. 109. They are valid for a single articulated^t rotor, with hinge springs and viscous dampers. Further all three hinges are physically separated and the model allows for both CW and CCW rotating main rotors. Although the flap-lag equations of motion are valid for small flap, lag, and pitch angles, the exact tangential and perpendicular blade velocity expressions have been retained, hence full coupling between vehicle and blade dynamics is modeled.

For the rotor forces, the procedure consists in integrating the elementary lift and drag forces over the blade span, then average (integrate) the result over one revolution, and finally multiply by the total number of blades.¹⁰⁷ The integrations are done numerically, through Gaussian quadrature integration, using a fifth order Legendre polynomial scheme.^{215,216} For the rotor moments, they include contributions from four different sources: aerodynamics, inertial loads, flap hinge stiffness, and lag hinge damping.¹⁰⁷

Regarding rotor inflow modeling for flight dynamics, we assumed that it was sufficient to consider the normal component of inflow at the rotor, i.e. the rotor induced downwash.²² For flight dynamics applications, it was reported in Ref. 133 that the Peters-He model was not remarkably better than the Pitt-Peters formulation. Since our primary interest is flight dynamics, we have thus chosen to implement the more straightforward Pitt-Peters model,^{126,128} with a correction for flight in the VRS from Ref. 217, and a pseudo-harmonic term to model thrust fluctuations in the VRS from Ref. 218.

Concerning wake bending during maneuvering flight, which may significantly change the inflow distribution over the rotor resulting in a sign reversal in the off-axis response, we chose to use the extended momentum constant coefficients model of Ref. 134, 143, 144 as it is simple to implement.^{24,47,219}

For the aspect of ground effect, only a static ground effect has been accounted for, by a correction factor applied to the non-dimensional total velocity at the rotor disk center.¹⁵⁸

Finally for the atmospheric disturbance, currently only deterministic wind linear velocity inputs are available. Furthermore, for the case of our helicopter UAV and due to its small scale compared to the large-scale turbulence model, we will assume that the entire rotor disk experiences a spatially uniform turbulence velocity, identical to that at the rotor center, hence spatial gradients effects will be deemed insignificant.

V. Tail Rotor Modeling

V.A. Assumptions

Structural simplifications

- The blade has zero twist, constant chord, zero sweep, and has constant thickness ratio.
- The blade is rigid, hence torsion is neglected.

Aerodynamics simplifications

- Linear lift with constant lift curve slope, and uniform induced flow over the rotor.
- Aerodynamic interference effects from main rotor are neglected.
- Compressibility, blade stall and viscous flow effects are disregarded.

Dynamical simplifications

- No blade dynamics and simplified inflow dynamics.
- Unsteady effects neglected.

^tAlthough this model, with a proper combination of hinge offset and springs about the hinge, could also be used to model a hingeless rotor.

V.B. Modeling

The tail rotor is a powerful design solution for torque balance, directional stability and control of single main rotor helicopters. The theory we apply here is based on the work done by Bailey in Ref. 220. The chosen model, reported in detail,¹⁰⁷ is the standard approach towards tail rotor modeling, as implemented among others in Ref. 4, 221, 222.

VI. Simulation Results

Simulation plots and visual comparisons of our model, implemented in a MATLAB[®] environment,²²³ with an equivalent helicopter FLIGHTLAB²⁶ model are described next, for a R/C flybarless two-bladed main rotor helicopter UAV, which physical characteristics are documented in Appendix B. For the FLIGHTLAB model, the following options have been selected.

- Articulated rotor, and blade element model. Quasi-steady airloads, based on the Peters-He three-state inflow model, with no stall delay effects.
- Bailey tail rotor, and ideal engine.

The model's simulation plots, presented in the sequel, are based on an adapted version of our baseline model. Specifically, the static expressions of the Pitt-Peters inflow model have been retained in lieu of the dynamic ones, since the former ones provide a better match with FLIGHTLAB. This unexpected observed behavior is a subject of ongoing research.

VI.A. Trim Results

A trim condition is equivalent to an equilibrium point, also called an operating point of a nonlinear system, which can be thought of as a specific flight condition.⁵² Further, trim settings are a prerequisite for stability analysis, vibration studies, and control systems synthesis. Indeed, any flight vehicle should be able to maintain equilibrium during steady flight conditions, this means that the resultant forces and moments on the vehicle are equal to zero.²²⁴ For helicopters however, the concept of trim is more complicated than of fixed-wing aircrafts.²²⁵ A helicopter has components that rotate with respect to each other and with respect to the air mass. Hence, periodic forces and moments enter the dynamic equations, and we cannot simply eliminate them by averaging.²²⁵

Our trim module is structured as a constrained optimization problem. At equilibrium the resultant forces and moments on the vehicle should be equal to zero, hence the objective of the trim module is to minimize the three vehicle linear accelerations and the three rotational accelerations. The variables that the algorithm is allowed to manipulate include the four control inputs, and the vehicle roll and pitch states, since these latter two influence the projection of the gravity vector on the body frame. Additionally, constraints are specified, i.e. by assigning fixed values to the three vehicle linear velocities, the three vehicle rotational velocities, and by setting to zero the three dynamic inflow linear accelerations. Now regarding the periodic states, i.e. blade flap and lag positions and velocities, these states are handled by time-marching the nonlinear helicopter model long enough until the transients have decayed. Finally, the remaining four states which include the three vehicle Cartesian position and the vehicle heading are left free, since the position of the helicopter does not influence^u its dynamic behavior or stability. The optimization is further based on a Newton iteration scheme, similar to that of Ref. 222, which is simple to implement and has been widely used.²²⁶ The Newton method guarantees quadratic convergence, but only guarantees local convergence, and is also sensitive to initial starting values. Even with good starting values, the method can exhibit erratic divergence due to for example numerical corruption.²²⁶ Hence over the years, several other approaches have been researched, for a review of helicopter trim strategies see among others Ref. 22, 224–230.

^uAlthough strictly speaking this is not true in vertical flight, due to the ground effect when trimming near the ground, and due to changes in air density when trimming with a non-zero vertical velocity; however for the case of air density variations, these may be neglected when considering small-scale UAV applications, since the flight altitude is generally within 200-300m above ground.

Comparisons of model trim results with FLIGHTLAB are discussed next. In figure 1, figure 4, and figure 7 the roll and pitch angles are plotted as a function of body linear velocities $(u, v, w)^v$. We see that the maximum absolute deviations do not exceed 0.4° , refer also to table 1. In figure 2, figure 5, and figure 8 the main and tail rotors collective inputs are visualized, together with the main rotor power. For the main and tail rotor collective the match with FLIGHTLAB is good to very good, while the agreement on main rotor power is only good up until a velocity^w around $u = 20\text{m/s}$. Further the top figure of figure 2 also gives us the minimum power speed, also called the *bucket speed*, predicted to be around $u = [15 - 18]\text{m/s}$ by the model and FLIGHTLAB respectively. Additionally and as expected, we see from the top figure of figure 5 that it takes more power for vehicle starboard flight (i.e. to the right) than for port-side (i.e. left) flight. This is due to the fact that the main rotor turns CW which implies that the tail rotor thrust is oriented towards port-side to counter the main rotor torque. For the longitudinal and lateral cyclic inputs, these are given in figure 3, figure 6, and figure 9. Overall, as given from table 1, the fit can be considered as being good to very good.

We conclude this trim section by quickly addressing the issue of steady autorotative flight.⁷³ figure 10 gives the main rotor power as a function of vehicle velocity V , for several flight path angles FP , ranging between -15° and -45° . Now in autorotation the clutch^x is disengaged, and if we neglect the power losses due to the transmission/gearbox and any power losses from the tail rotor^y, then the zero-torque values as given by points A and B in figure 10 ought to give us the required vehicle velocity and flight path angle to achieve a steady autorotative flight, at the nominal main rotor RPM. For the case of our helicopter, we see that both the model and FLIGHTLAB predict these values to be at $V = 10.5\text{m/s}$ for $FP = -45^\circ$ and $V = 13.3\text{m/s}$ for $FP = -30^\circ$. Finally figure 11 has been added to visualize the effect of vehicle mass variation on the autorotative velocity. We first note the paradox, as reported in Ref. 231, that the autorotative rate of descent increases as the vehicle mass decreases, see points C and D in figure 11. Second, and for the case of our small-scale helicopter, this effect may be qualified as weak, since a 25% variation in vehicle mass results only in a 4% variation of vehicle autorotative velocity, and hence rate of descent.

Name	$ \Delta_{max} $ (in $^\circ$)		
	along u	along v	along w
Roll	0.35	0.25	0.4
Pitch	0.4	0.25	0.1
MR Collective	0.6	0.6	0.7
TR Collective	0.75	1	0.7
MR Longitudinal Cyclic	0.25	0.6	0.05
MR Lateral Cyclic	0.65	0.25	0.02

Table 1. Maximum absolute deviations in trim between model and FLIGHTLAB

VI.B. Dynamic Results

For the validation of a model dynamic responses, we may consider two approaches. The first one consists in obtaining a linearized model which describes the small perturbation motion about a trimmed equilibrium position. The validation is then carried out by comparing the frequency response predicted by the linearized model and the frequency response obtained from either an equivalent linear FLIGHTLAB model, or from a linear model identified from flight test data. The second approach consists in comparing the time histories of the (nonlinear) model and those obtained from again either FLIGHTLAB, or flight test data. In this paper, we only provide visual comparisons of time histories data with FLIGHTLAB for roll/pitch/yaw angles

^vWith w positive down.

^wThe Bell UH-1H top speed is 60.28m/s , thus based on Froude scaling⁶⁸ with $N = 7.75$ the top speed of our R/C helicopter would then be $60.28/\sqrt{N} = 21.65\text{m/s}$. Hence for our helicopter a speed of $u = 20\text{m/s}$ may be considered as a top speed. In fact we do not intend to operate the vehicle beyond a speed range of $[10 - 15]\text{m/s}$.

^xAll helicopters are equipped with an overrunning clutch between the transmission and the engine, so that the rotor does not have to drive a dead engine during autorotation.

^yIn case the tail rotor is still driven by the main rotor even though the clutch is disengaged. Note that this is not the case for all R/C helicopters.

(ϕ, θ, ψ) , linear velocities (u, v, w) , and rotational velocities (p, q, r) . Since a helicopter is also a perfect example of a Multiple-Input-Multiple-Output (MIMO) system, table 2 has been provided to better understand the impact of each input channel on the vehicle response.

		Response			
		Pitch	Roll	Yaw	Climb/Descent
Input Axis	Long stick	Prime	Due to lat flapping	Negligible	Desired in fwd flight
	Lat stick	Due to long flapping	Prime	Undesired in hover, desired in fwd flight	Descent with bank angle
	Rudder	Negligible	Roll due to TR thrust & sideslip	Prime (hover)	Undesired, due to power changes in hover
	Collective	Due to transient & steady long flapping	Due to transient & steady lat flapping & sideslip	Power change varies requirement for TR thrust	Prime

Table 2. Single-rotor helicopter coupling sources (short version, from Ref. 232). *Long* stands for Longitudinal, *Lat* for Lateral

The tests are set to evaluate the open-loop response of this highly unstable model, at a constant main rotor RPM. First, the rotor is allowed to reach a steady-state condition during a time period of 0.5s. Then, for the following 3s we simultaneously apply on the four input channels a sinusoid of 1° in amplitude, at a frequency of 2Hz^z .

The first test is run from a hover trim condition, see figure 12, where it can be seen that the overall fit with FLIGHTLAB is good to very good. The second test is carried out to evaluate the medium speed characteristics at $u = 5\text{m/s}$, see figure 13, where we can see that the match with FLIGHTLAB is good to very good for $(\phi, \theta, \psi, w, p, q, r)$, while the fit for (u, v) is good for the first 2s, after which the quality of the fit starts to decrease. The third trial is run to check the high speed flight at $u = 10\text{m/s}$, see figure 14, where we can see that the match with FLIGHTLAB is acceptable for q , is good to very good for (ϕ, ψ, v, p, r) , and the fit for (θ, u, w) is good for the first 2s, after which the quality of the fit starts to decrease. Finally the fourth test is run to check the response in the VRS region, see figure 15, at a value $w = 5\text{m/s}$ corresponding to approximately one time the induced velocity in hover. Here it can be seen that states $(\phi, \theta, u, v, p, q)$ exhibit a good to very good match with FLIGHTLAB, that the fit for w is good for the first 1.5s - 2s, while the yaw axis (ψ, r) fit deteriorates after 1s.

Regarding the observed discrepancies between our model and FLIGHTLAB, especially those seen at high speed or on the yaw channel in the VRS, these may very probably be attributed to the following five items: (i) validity of the flap-lag equations of motion up to about $u = 10 - 15\text{m/s}$, see Ref. 109, (ii) a somewhat distinct implementation of the Bailey type tail rotor, (iii) a distinct implementation of the induced rotor flow, i.e. FLIGHTLAB uses the Peters-He finite-state wake model,^{130–132} while our model applies the static

^zCorresponding to the maximum anticipated closed-loop system bandwidth for autonomous flight.

version of the Pitt-Peters model,^{126, 128} (iv) a distinct implementation of the induced rotor flow in the VRS, i.e. FLIGHTLAB uses the method presented in Ref. 233, while our model utilizes a slightly adapted version of Ref. 217, and finally (v) any side-effects due to the model simplifications as presented in Section IV. This said, we believe that most of the observed differences may primarily be attributed to the first three items, namely distinct models and hence behavior of the main rotor blade flap-lag, tail rotor inflow, and main rotor inflow.

VII. Conclusion

We have presented a UAV helicopter flight dynamics nonlinear model for a flybarless articulated Pitch-Lag-Flap (P-L-F) main rotor, with rigid blades, and applicable for high bandwidth control specifications. The model allows for both ClockWise and Counter-ClockWise main rotor rotation, and is valid for a range of flight conditions including autorotation and the Vortex-Ring-State (VRS). Further, this model has been compared with an equivalent FLIGHTLAB nonlinear model. Simulation results show that the match between the model and FLIGHTLAB is very good for static (trim) conditions, is good to very good for dynamic conditions from hover to medium speed flight $u = 5\text{ m/s}$, is fair to good for dynamic conditions at high speed $u = 10\text{ m/s}$, and except for the yaw channel is also good in the VRS. While keeping in mind the model's accuracy reduction at high speed, this model could potentially be used to simulate and investigate the flight dynamics of a flybarless small-scale UAV helicopter, including in autorotation and VRS conditions, as well as provide a basis for model-based control design. Indeed, future work will focus on the development of nonlinear and linear control schemes. In particular, we have currently used an adapted version of this model, based on closed-form expressions, to obtain optimal helicopter flight trajectories, by solving constrained nonlinear optimal control problems. This topic will be elaborated upon in future publications.

Appendix A: Simulation Results

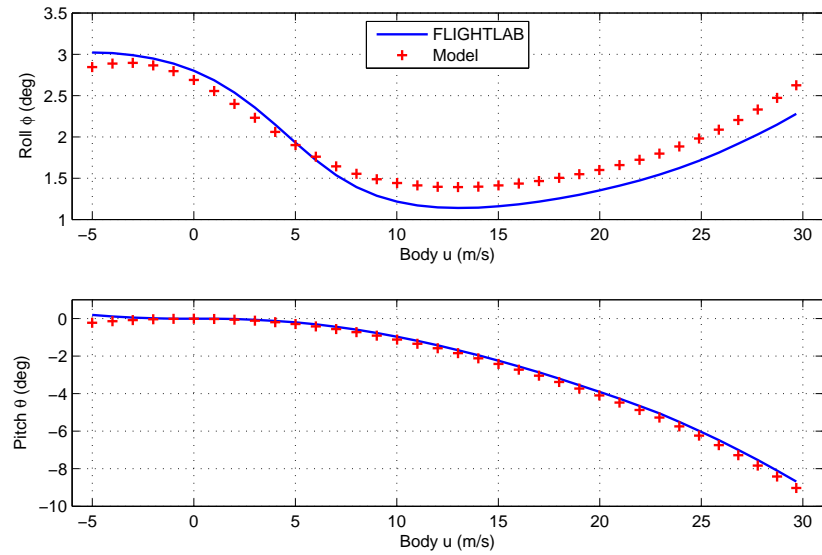


Figure 1. Trim roll and pitch angles as a function of body longitudinal velocity u

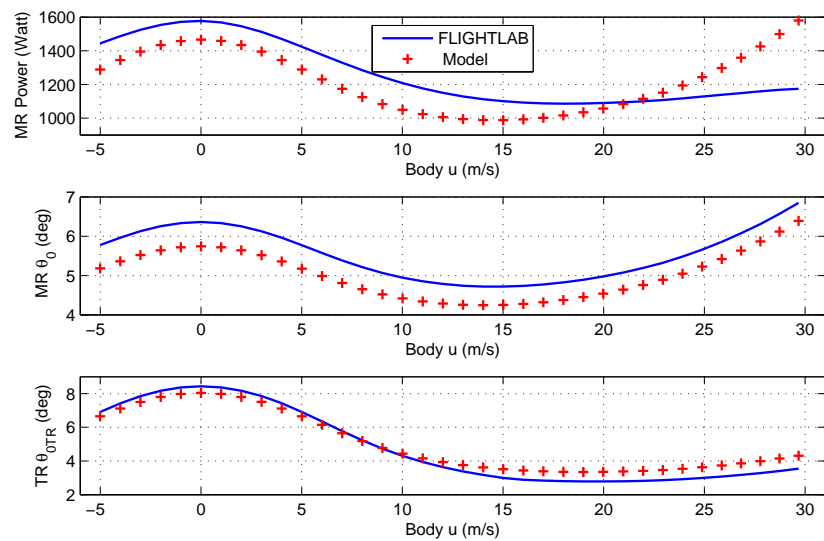


Figure 2. Trim main rotor power and main/tail rotor collective pitch angles as a function of body longitudinal velocity u

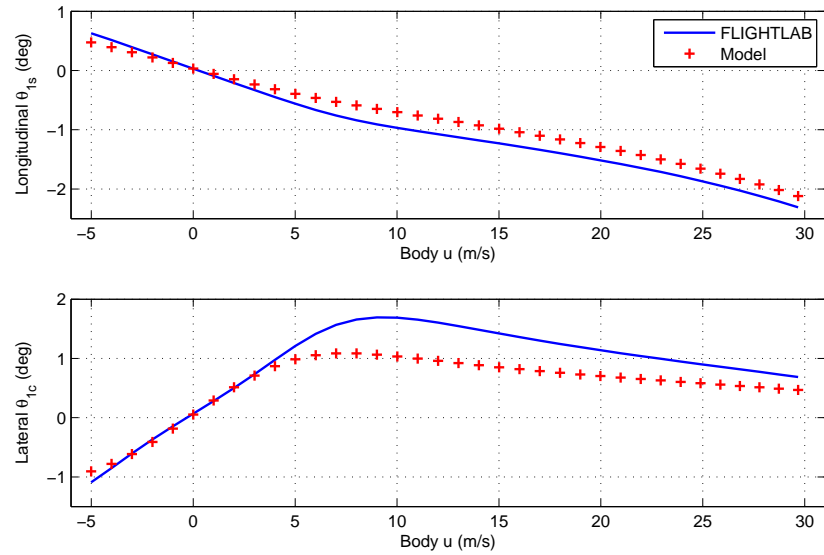


Figure 3. Trim main rotor longitudinal and lateral cyclic pitch angles as a function of body longitudinal velocity u

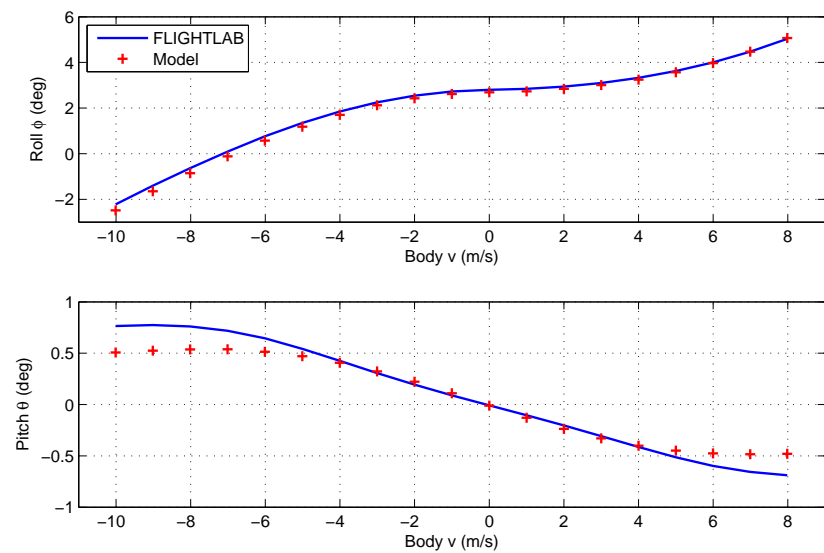


Figure 4. Trim roll and pitch angles as a function of body lateral velocity v

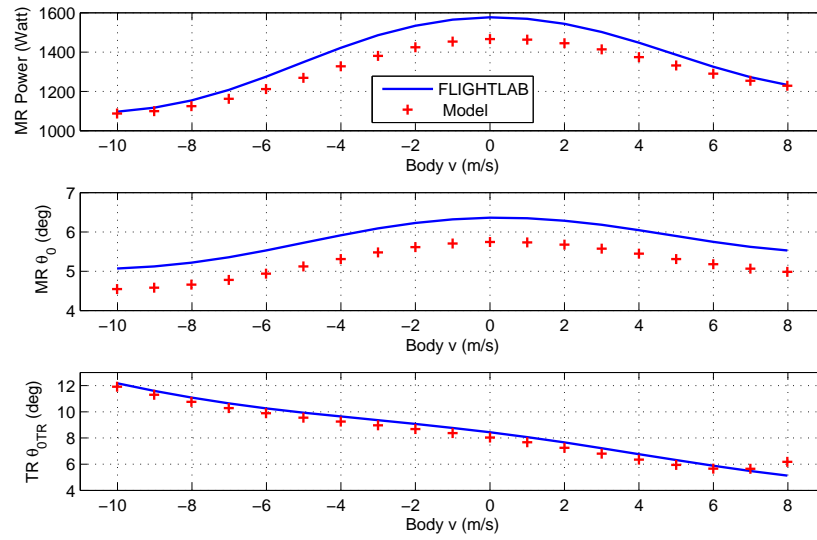


Figure 5. Trim main rotor power and main/tail rotor collective pitch angles as a function of body lateral velocity v

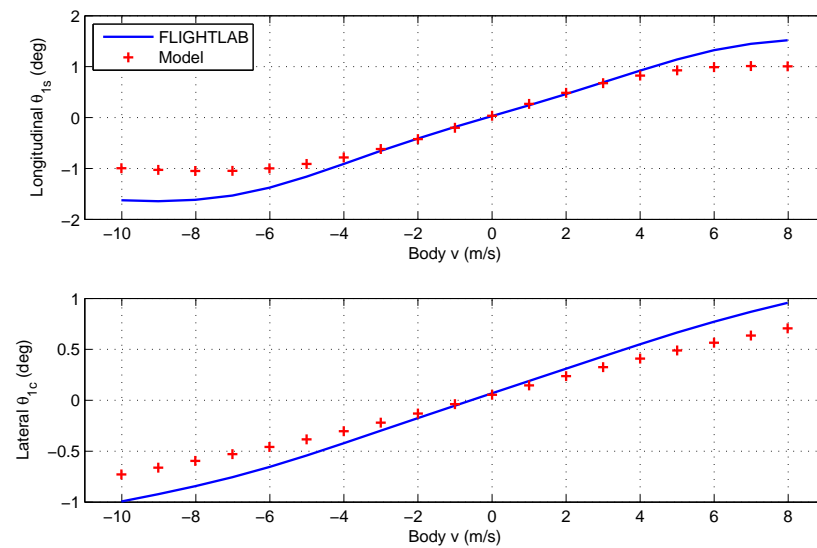


Figure 6. Trim main rotor longitudinal and lateral cyclic pitch angles as a function of body lateral velocity v

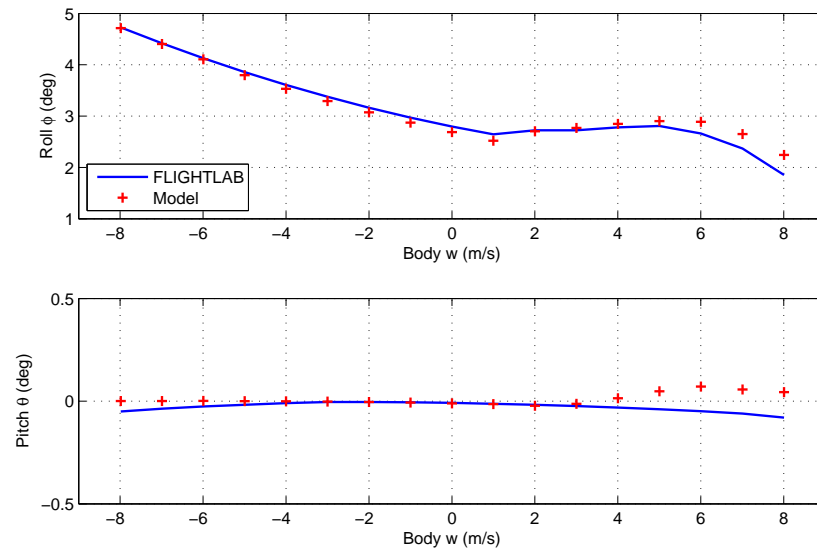


Figure 7. Trim roll and pitch angles as a function of body vertical velocity w

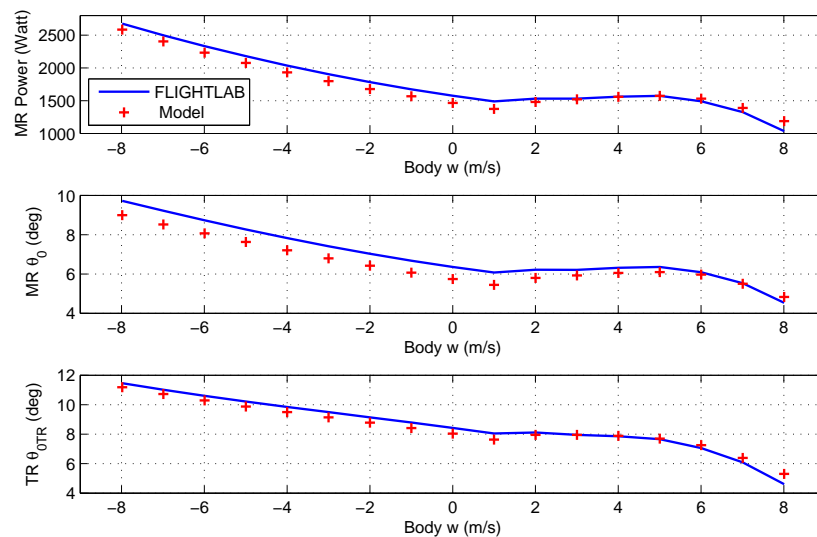


Figure 8. Trim main rotor power and main/tail rotor collective pitch angles as a function of body vertical velocity w

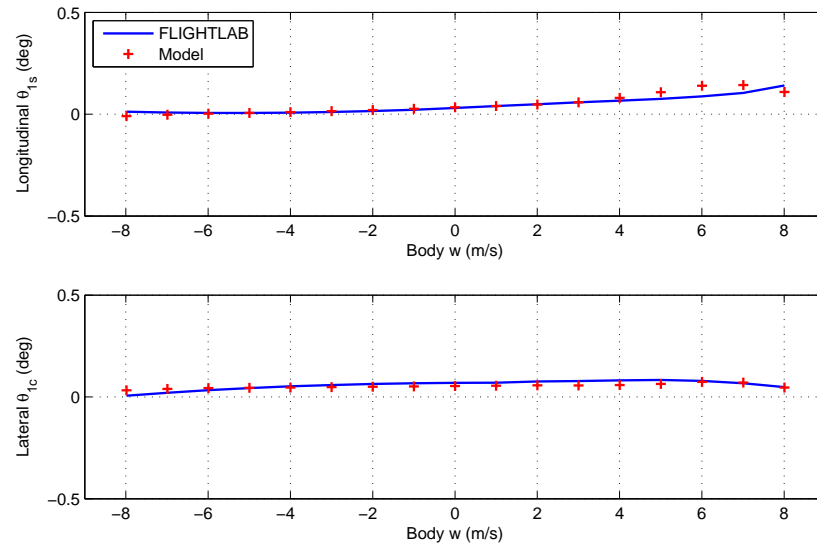


Figure 9. Trim main rotor longitudinal and lateral cyclic pitch angles as a function of body vertical velocity w

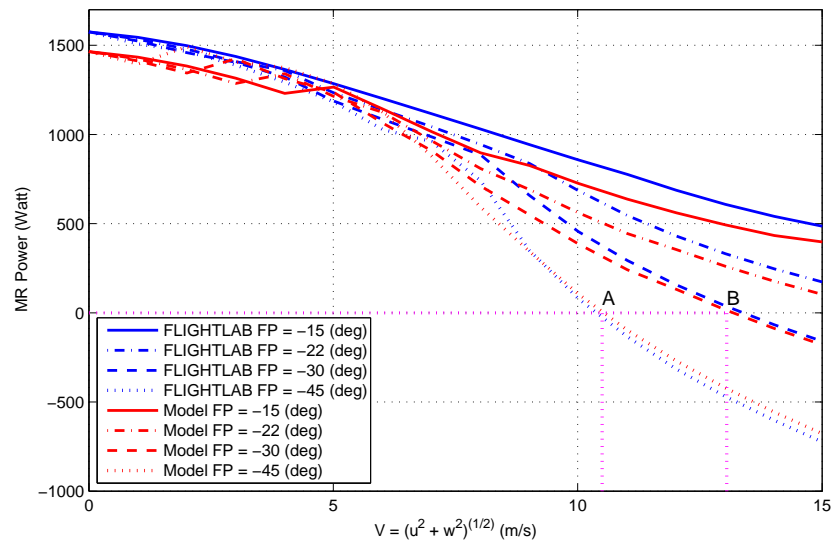


Figure 10. Trim main rotor power as a function of vehicle velocity V and flight path angle FP

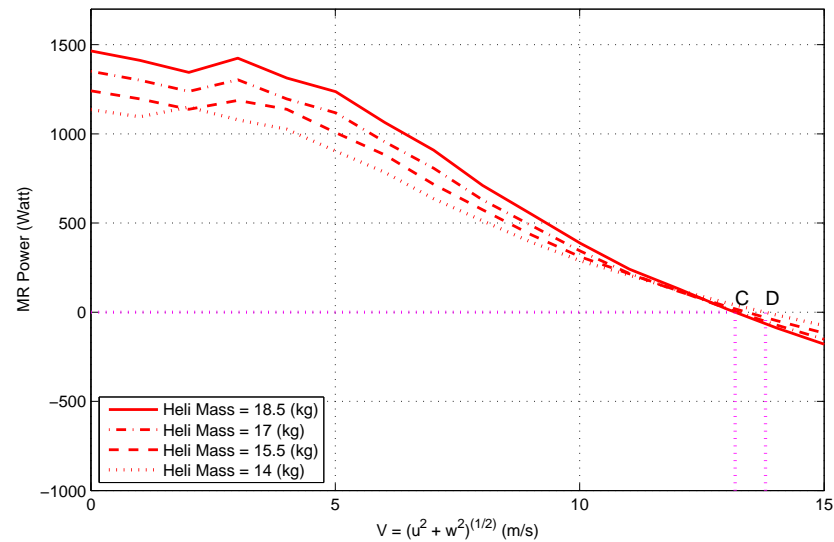


Figure 11. Trim main rotor power as a function of vehicle velocity V for several vehicle mass, at a flight path angle $FP = -30^\circ$

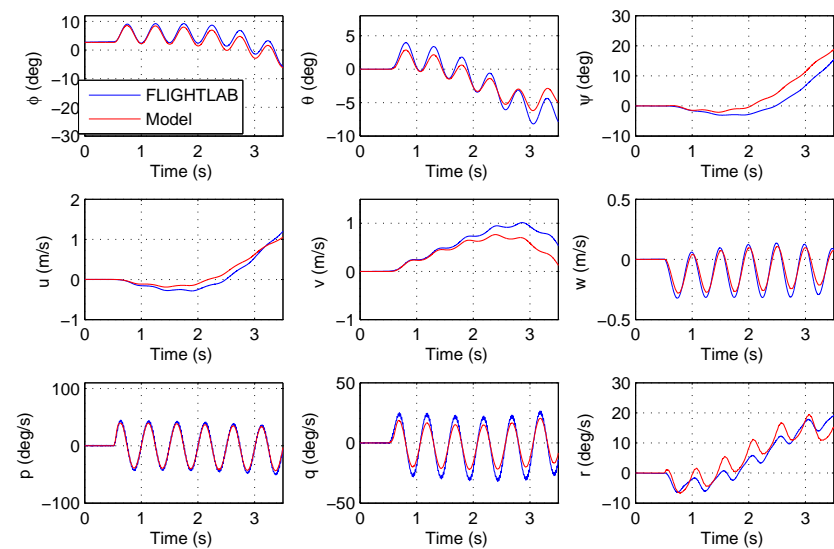


Figure 12. Vehicle response to sinusoidal inputs (at hover)

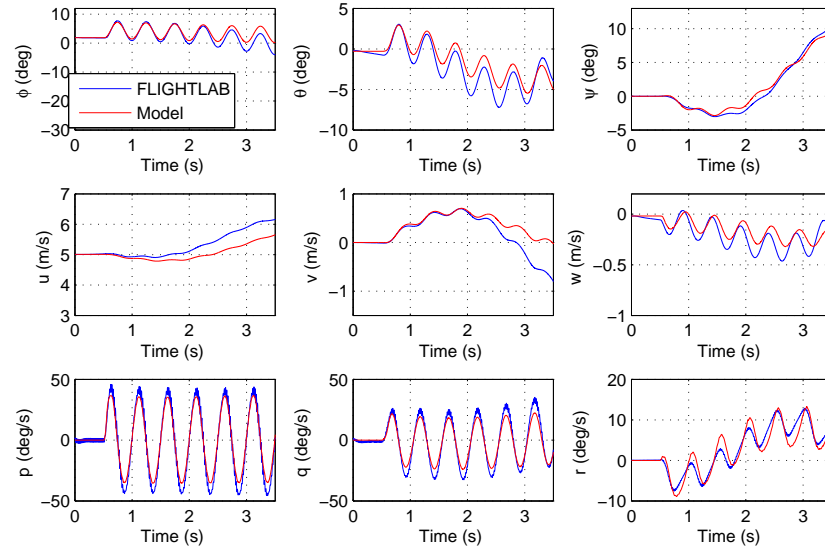


Figure 13. Vehicle motion: response to sinusoidal inputs (at $u = 5$ m/s)

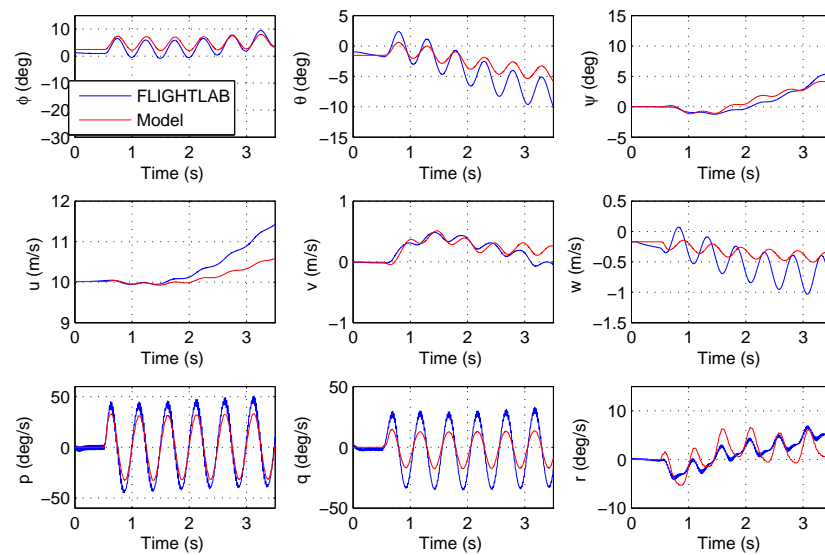
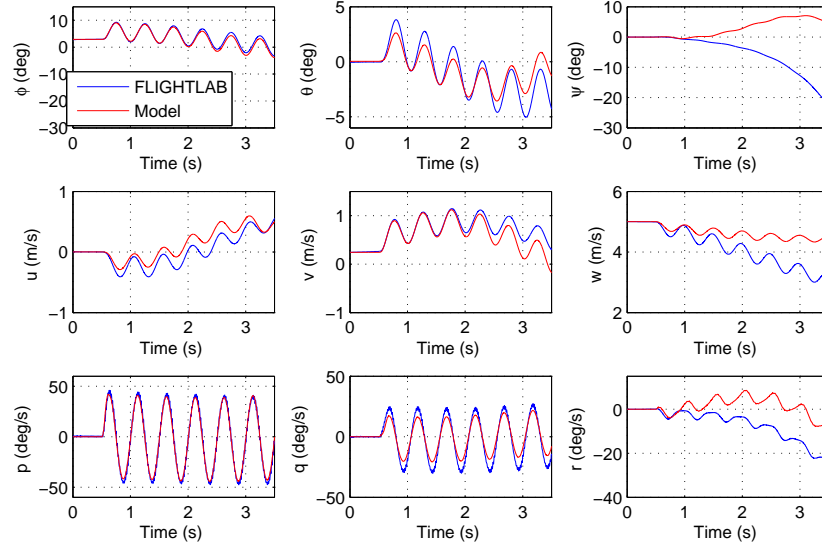


Figure 14. Vehicle response to sinusoidal inputs (at $u = 10$ m/s)

Figure 15. Vehicle response to sinusoidal inputs (at $w = 5$ m/s)

Appendix B: Physical Parameters

	Name	Parameter	Value	Unit
Environment	Air density	ρ	1.2367	kg/m^3
	Static temperature	T	$273.15 + 15$	K
	Specific heat ratio (air)	γ	1.4	
	Gas constant (air)	R	287.05	$J/kg.K$
	Gravity constant	g	9.812	m/s^2
Vehicle	Total mass	$m_{Zero f}$	18.5	kg
	Fuselage mass	m_{Fus}	17.94	kg
	Fuselage inertia moment wrt x_b	A	0.3	$kg.m^2$
	Fuselage inertia moment wrt y_b	B	0.76	$kg.m^2$
	Fuselage inertia moment wrt z_b	C	0.86	$kg.m^2$
	Fuselage inertia product wrt x_b	D	0	$kg.m^2$
	Fuselage inertia product wrt y_b	E	0	$kg.m^2$
	Fuselage inertia product wrt z_b	F	0	$kg.m^2$
	X-pos. of fus. CG wrt total CG	x_H	0	m
	Y-pos. of fus. CG wrt total CG	y_H	0	m
	Z-pos. of fus. CG wrt total CG	z_H	0.015	m
	X-pos. of MR hub wrt total CG	x_H	0	m
	Y-pos. of MR hub wrt total CG	y_H	0	m
	Z-pos. of MR hub wrt total CG	z_H	-0.36	m
	X-pos. of TR hub wrt total CG	x_{TR}	-1.150	m
	Y-pos. of TR hub wrt total CG	y_{TR}	0.040	m
	Z-pos. of TR hub wrt total CG	z_{TR}	-0.070	m
	Direction of rotation	Γ	-1 (CW)	
	Number of blades	N_b	2	
	Nominal angular velocity	$\Omega_{MR100\%}$	151.843	rad/s

Main Rotor MR	Rotor radius from hub	R_{rot}	0.944	m
	Swashplate phase angle	ψ_{PA}	0	rad
	Precone angle	β_P	0	rad
	Pitch-flap coupling ratio	$K_{(\theta\beta)}$	0	
	Pitch-lag coupling ratio	$K_{(\theta\zeta)}$	0	
	Spring restraint coef. due to flap	$K_{S\beta}$	271.1635	$N.m/rad$
	Spring damping coef. due to flap	$K_{D\beta}$	0	$N.m.s/rad$
	Spring restraint coef. due to lag	$K_{S\zeta}$	0	$N.m/rad$
	Spring damping coef. due to lag	$K_{D\zeta}$	24.4047	$N.m.s/rad$
	Off-axis roll coef.	K_p	0	
	Off-axis pitch coef.	K_q	0	
	Offset distance	e_P	0.035	m
	Offset distance	e_L	0.049	m
	Offset distance	e_F	0.010	m
	Blade mass	M_{bl}	0.277	kg
	Blade twist at tip	θ_{wash}	0	rad
	Blade chord	c_{bl}	0.076	m
	Hub arm chord	c_{hub}	0.015	m
	Root cutout from flap hinge	r_c	0.006	m
	Y-pos. blade CG wrt flap hinge	$y_{G_{bl}}$	0.8932	m
	Tip loss factor	B	0.97	
	Airfoil lift coef.	$c_{l_{bl}}$	NACA0012	
	Airfoil drag coef.	$c_{d_{bl}}$	NACA0012	
	Airfoil pitching moment coef.	c_M	NACA0012	
	Lift deficiency factor	K_{defic}	0.89	
Transmission	Gearbox transmission ratio	GB	4.67	
Tail Rotor TR	Number of blades	$N_{b_{TR}}$	2	
	Rotor radius from hub	$R_{rot_{TR}}$	0.18	m
	Pitch-flap coupling	$\delta_{3_{TR}}$	0	rad
	Preset collective pitch bias	$\theta_{bias_{TR}}$	0	rad
	Partial coning angle wrt thrust	$\beta_{0_{TR}}$	0	rad/N
	Tail blockage constant	b_{t_1}	1	
	Transition velocity	v_{bl}	0	m/s
	Blockage due to vertical fin	k_{bl}	1	
	Correction factor	$K_{TR_{corr}}$	1/1.270	
	Blade chord	c_{TR}	0.035	m
	Tip loss factor	B_{TR}	0.92	
	Airfoil lift curve slope	$c_{l_{(0,TR)}}$	5.73	rad^{-1}
	Blade drag coef.	$c_{d_{TR}}$	0.035	
Actuators	MR collective range	θ_0	$[-3,10].\pi/180$	rad
	MR lateral cyclic range	θ_{1c}	$[-7,7].\pi/180$	rad
	MR longitudinal cyclic range	θ_{1s}	$[-7,7].\pi/180$	rad
	TR collective range	$\theta_{0_{TR}}$	$[-12,18].\pi/180$	rad

Table 3: Physical Parameters

References

- ¹DoD, "Unmanned Aircraft Systems (UAS) Roadmap 2005-2030," Tech. rep., U.S.A. DoD, 2005.
- ²DoD, "Flying Qualities of Piloted V/STOL Aircraft," Tech. Rep. Specification MIL-F-83300, 1970.
- ³Howlett, J. J., "RSRA Simulation Model-Vol. I. Mathematical Model Equations," Tech. Rep. SER-72009, Sikorsky Aircraft, 1974.
- ⁴Houck, J. A., Moore, F. L., Howlett, J. J., Pollock, K. S., and Browne, M. M., "Rotor Systems research Aircraft Simulation Mathematical Model," Tech. Rep. NTM 78629, NASA Langley Research Center, 1977.
- ⁵Chen, R. T. N., "A Simplified Rotor System Mathematical Model for Piloted Flight Dynamics Simulation," Tech. Rep. NTM 78575, NASA Ames Research Center, 1979.
- ⁶Aiken, E. W., "A Mathematical Representation of an Advanced Helicopter for Piloted Simulator Investigations of Control-System and Display Variations," Tech. Rep. TM-81203, NASA, 1980.
- ⁷Howlett, J., "UH-60A Black Hawk Engineering Simulation Program: Volume I - Mathematical Model," Tech. Rep. CR-166309, NASA, 1981.
- ⁸Talbot, P. D., Tinling, B. E., Decker, W. A., and Chen, R. T. N., "A Mathematical Model of a Single Main Rotor Helicopter for Piloted Simulation," Tech. Rep. NTM 84281, NASA Ames Research Center, 1982.
- ⁹Phillips, J. D., "Mathematical Model of the 34-3G Helicopter," Tech. Rep. TM 84316, NASA, 1982.
- ¹⁰Hackett, W. E., Gernett, T. S., and Borek, B. V., "Mathematical Model for the CH-47B Helicopter Capable of Real-Time Simulation of the Full Flight Envelope," Tech. Rep. CR 166458, NASA, 1983.
- ¹¹Weber, J. M., Liu, T. Y., and Chung, W., "A Mathematical Simulation Model of a CH-47B Helicopter," Tech. Rep. TM 84351, NASA, 1984.
- ¹²Hilbert, K. B., "A Mathematical Model of the UH-60 Helicopter," Tech. Rep. TM-85890, NASA Ames Research Center, 1984.
- ¹³Ballin, M. G., "Validation of a Real-Time Engineering Simulation of the UH-60A Helicopter," Tech. Rep. TM 88360, NASA Ames Research Center, 1987.
- ¹⁴Heffley, R. K. and Mnich, M. A., "Minimum-Complexity Helicopter Simulation Math Model," Tech. Rep. NCR 177476, NASA Ames Research Center, 1988.
- ¹⁵Chen, R. T. N., Lebacqz, J. V., Aiken, E. W., and Tischler, M. B., "Helicopter Mathematical Models and Control Law Development for Handling Qualities Research," Tech. Rep. NCR 2495, NASA Ames Research Center, 1988.
- ¹⁶Zhao, X. and Curtiss, H. C., "A Linearized Model of Helicopter Dynamics Including Correlation with Flight Test," *2nd International Conference on Rotorcraft Basic Research*, 1988.
- ¹⁷Bir, G. S., Chopra, I., and Nguyen, K., "Development of UMARC (University of Maryland Advanced Rotorcraft Code)," *46th Annual Forum of the American Helicopter Society*, 1990.
- ¹⁸Takahashi, M. D., "A Flight-Dynamic Helicopter Mathematical Model with a Single Flap-Lag-Torsion Main Rotor," Tech. Rep. TM 102267, NASA Ames Research Center, 1990.
- ¹⁹Harrison, J. M. and Shanthakumaran, P., "AH-64 Apache Engineering Simulation - FLYRT Engineering Manual," Tech. Rep. TR 90-A-011, USAAVSCOM, 1990.
- ²⁰Harrison, J. M. and Shanthakumaran, P., "A Helicopter Flight Model Suitable for Aggressive Maneuvers," Tech. Rep. RTTN-91-004, MDHC, 1991.
- ²¹Rand, O. and Barkai, S. M., "Numerical Evaluation of the Equations of Motion of Helicopter Blades and Symbolic Exactness," *Journal of the American Helicopter Society*, 1995.
- ²²Padfield, G. D., *Helicopter Flight Dynamics*, Blackwell Science Ltd, Oxford, UK, 1996.
- ²³"Aeronautical Design Standard-33E-PRF," Tech. rep., U.S. Army Material Command, 1999.
- ²⁴Benoit, B., Deguin, A. M., Kampa, K., von Grunhagen, W., Basset, P. M., and Gimonet, B., "HOST a General Helicopter Simulation Tool for Germany and France," *56th Annual Forum of the American Helicopter Society*, 2000.
- ²⁵van Hoydonck, W. R. M. and Pavel, M., "Development of a Modular, Generic Helicopter Flight Dynamics Model for Real-Time Simulations," *AIAA Modeling and Simulation Technologies Conference and Exhibit*, 2007.
- ²⁶ART, <http://www.flightlab.com/>, Mountain View CA., U.S.A.
- ²⁷Friedman, C., Fertman, A., and Rand, O., "A Generic Rotorcraft Simulation Using Matlab/Simulink," *65th Annual Forum of the American Helicopter Society*, 2009.
- ²⁸Blake, B. B. and Lunn, K., "Helicopter Stability and Control Test Methodology," *AIAA Atmospheric Flight Mechanics Conference*, 1980.
- ²⁹Anonymous, "Handling Qualities Requirements for Military Rotorcrafts," Tech. Rep. ADS-33D-PRF, United States Army and Troop Command, Aviation Research and Development Center, St Louis, Missouri, 1996.
- ³⁰Hong, S. W. and Curtiss, H. C., "An Analytic Modeling and System Identification Study of Rotor Fuselage Dynamics at Hover," Tech. Rep. CR-192303, NASA, 1993.
- ³¹Curtiss, H. C., "Rotorcraft Stability and Control, Past, Present, and Future. The 20th Annual Alexander A. Nikolsky Lecture," *Journal of the American Helicopter Society*, 2003.
- ³²Pallett, T. J. and Ahmad, S., "Real-Time Helicopter Flight Control: Modelling and Control by Linearization and Neural Networks," Tech. Rep. TR-EE 91-35, Purdue University School of Electrical Engineering, 1991.
- ³³Morris, J. C., van Nieuwstadt, M., and Bendotti, P., "Identification and Control of a Model Helicopter in Hover," *American Control Conference*, 1994.
- ³⁴Weilenmann, M. F. and Geering, H. P., "Test Bench for Rotorcraft Hover Control," *AIAA Journal of Guidance, Control, and Dynamics*, Vol. 17, No. 4, 1994, pp. 729-736.
- ³⁵Bendotti, P. and Morris, J. C., "Robust Hover Control for a Model Helicopter," *American Control Conference*, 1995.

- ³⁶Conway, A., *Autonomous Control of an Unstable Helicopter Using Carrier Phase GPS Only*, Ph.D. thesis, Stanford University, 1995.
- ³⁷Johnson, E. N. and DeBitetto, P. A., "Modeling and Simulation for Small Autonomous Helicopter Development," *AIAA Modeling and Simulation Technologies Conference*, 1997.
- ³⁸Grady, N. B., Frye, M. T., and Qian, C., "The Instrumentation and Flight Testing of a Rotorcraft Vehicle for Undergraduate Flight Control Research," *AIAA Modeling and Simulation Technologies Conference and Exhibit*, 2006.
- ³⁹Cai, G., Chen, B. M., Peng, K., Dong, M., and Lee, T. H., "Modeling and control system design for a UAV helicopter," *Proceedings of the 14th Mediterranean Conference on Control and Automation*, 2006.
- ⁴⁰Velez, C. M., Agudelo, A., and Alvarez, J., "Modeling, Simulation and Rapid Prototyping of an Unmanned Mini-Helicopter," *AIAA Modeling and Simulation Technologies Conference and Exhibit*, 2006.
- ⁴¹Zhao, L. and Murthy, V. R., "Optimal Controller for an Autonomous Helicopter in Hovering and Forward Flight," *47th AIAA Aerospace Sciences Meeting*, 2009.
- ⁴²Khaligh, S. P., Fahimi, F., and Saffarian, M., "Comprehensive Aerodynamic Modeling of a Small Autonomous Helicopter Rotor at All Flight Regimes," *AIAA Modeling and Simulation Technologies Conference*, 2009.
- ⁴³Furuta, K., Ohyama, Y., and Yamano, O., "Dynamics of RC Helicopter And Control," *Mathematics and Computers in Simulation*, Vol. 26, 1984, pp. 148–159.
- ⁴⁴Kim, S. K. and Tilbury, T. M., "Mathematical Modeling and Experimental Identification of a Model Helicopter," *AIAA Modeling and Simulation Technologies Conference*, 1998.
- ⁴⁵Munzinger, C., "Development of a Real-Time Flight Simulator for an Experimental Model Helicopter," Tech. rep., Master Thesis, Georgia Institute of Technology, 1998.
- ⁴⁶Shim, D. H., *Hierarchical Control System Synthesis for Rotorcraft-based Unmanned Aerial Vehicles*, Ph.D. thesis, University of California at Berkeley, 2000.
- ⁴⁷Civita, M. L., *Integrated Modeling and Robust Control for Full-Envelope Flight of Robotic Helicopters*, Ph.D. thesis, Carnegie Mellon University, 2002.
- ⁴⁸Cunha, R. and Silvestre, C., "Dynamic Modeling and Stability Analysis of Model-Scale helicopters with Bell-Hiller Stabilizing Bar," *AIAA Guidance, Navigation, and Control Conference*, 2003.
- ⁴⁹Tanner, O., *Modeling, Identification, and Control of Autonomous Helicopters*, Ph.D. thesis, ETH Zurich, 2003.
- ⁵⁰de Jong, A., "Helicopter UAV Control Using Classical Control," Tech. rep., Master Thesis, Delft University of Technology, 2004.
- ⁵¹Sudiyanto, T., Budiyo, A., and Sutarto, H. Y., "Hardware In-the-Loop Simulation for Control System Designs of Model Helicopter," *Aerospace Indonesia Meeting, Bandung*, 2005.
- ⁵²Hald, U. B., Hesselbaek, M. V., and Siegmundfeldt, M., "Nonlinear Modeling and Optimal Control of a Miniature Autonomous Helicopter," Tech. rep., Master Thesis, Aalborg University, 2006.
- ⁵³Bhandari, S. and Colgren, R., "6-DoF Dynamic Model for a Raptor 50 UAV Helicopter Including Stabilizer Bar Dynamics," *AIAA Modeling and Simulation Technologies Conference*, 2006.
- ⁵⁴Czyba, R., "Modelling of Unmanned Model-Scale Helicopter Dynamics for Needs of the Simulator," *11th IFAC Symposium on Large Scale Complex Systems Theory and Applications*, 2007.
- ⁵⁵Cai, G., Chen, B. M., Lee, T. H., and Lum, K. Y., "Comprehensive Nonlinear Modeling of an Unmanned-Aerial-Vehicle Helicopter," *AIAA Guidance, Navigation and Control Conference*, 2008.
- ⁵⁶Andersen, T. L., Lauritzen, D. F., Madsen, J. T., Sorensen, M. M., and Mertz, B. A., "Autonomous Inverted Hover of a Small Scale Helicopter," Tech. rep., Project Report, Aalborg University, 2008.
- ⁵⁷Bagnell, J. and Schneider, J., "Autonomous Helicopter Control Using Reinforcement Learning Policy Search Methods," *International Conference on Robotics and Automation*, 2001.
- ⁵⁸Buskey, G., Roberts, O., Corke, P., Ridley, P., and Wyeth, G., *Sensing and Control for a Small-Size Helicopter. in Experimental Robotics VIII*, pp. 476–486, Springer, Berlin/Heidelberg, 2003.
- ⁵⁹Ng, A. Y., Kim, H. J., Jordan, M., and Sastry, S., "Autonomous Helicopter Flight via Reinforcement Learning," *Neural Information Processing Systems (NIPS)*, 2004.
- ⁶⁰Engel, J. M., "Reinforcement Learning Applied to UAV Helicopter Control," Tech. rep., Master Thesis, Delft University of Technology, 2005.
- ⁶¹Amidi, O., *An Autonomous Vision-Guided Helicopter*, Ph.D. thesis, Carnegie Mellon University, 1996.
- ⁶²Shakernia, O., Sharp, C. S., Vidal, R., Shim, D. H., Ma, Y., and Sastry, S., "Multiple View Motion Estimation and Control for Landing an Unmanned Aerial Vehicle," *International Conference on Robotics and Automation*, 2002.
- ⁶³Roberts, J. M., Corke, P. I., and Buskey, G., "Low-Cost Flight Control System for a Small Autonomous Helicopter," *Australian Conference on Robotics and Automation*, 2002.
- ⁶⁴Saripalli, S., Montgomery, J. F., and Sukhatme, G. S., "Visually-Guided Landing of an Autonomous Aerial Vehicle," *IEEE Transactions on Robotics and Automation*, Vol. 19, No. 3, 2003, pp. 371–381.
- ⁶⁵Saripalli, S. and Sukhatme, G., "Landing on a Moving Target using an Autonomous Helicopter," *International Conference on Field and Service Robotics*, 2003.
- ⁶⁶Barabanov, A. E., Vazhinsky, N. Y., and Romaev, D. V., "Full Autopilot for Small Electrical Helicopter," *33th European Rotorcraft Forum*, 2007.
- ⁶⁷Gavrilets, V., Mettler, B., and Feron, E., "Nonlinear Model for a Small-Size Acrobatic Helicopter," *AIAA Guidance, Navigation and Control Conference*, 2001.
- ⁶⁸Mettler, B., *Identification Modelling and Characteristics of Miniature Rotorcraft*, Kluwer Academic Publishers, Norwell Mass, USA, 2003.
- ⁶⁹Marconi, L. and R.Naldi, "Robust NonLinear Control for a Miniature Helicopter for Aerobatic Maneuvers," *32nd European Rotorcraft Forum*, 2006.

- ⁷⁰Ng, A. Y., Coates, A., Diel, M., Ganapathi, V., Schulte, J., Tse, B., Berger, E., and Liang, E., "Autonomous Inverted Helicopter Flight via Reinforcement Learning," *International Symposium on Experimental Robotics*, 2004.
- ⁷¹Abbeel, P., Coates, A., Quigley, M., and Ng, A. Y., "An application of reinforcement learning to aerobatic helicopter flight," *NIPS 19*, 2007.
- ⁷²Abbeel, P., Coates, A., Hunter, T., and Ng, A. Y., "Autonomous Autorotation of an RC Helicopter," *11th International Symposium on Experimental Robotics (ISER)*, 2008.
- ⁷³Taamallah, S., "A Qualitative Introduction to the Vortex-Ring-State, Autorotation, and Optimal Autorotation," *36th European Rotorcraft Forum*, 2010.
- ⁷⁴Johnson, W., "CAMRAD/JA: A Comprehensive Analytical Model of Rotorcraft Aerodynamics and Dynamics, Volume I: Theory Manual," Tech. rep., Johnson Aeronautics, 1988.
- ⁷⁵Wang, G. and Gopisetty, R., "Efficient Generation of Timing and Power Polynomial Models from Lookup Tables for SoC Designs," *12th Annual IEEE International ASIC/SOC Conference*, 1999.
- ⁷⁶de Boor, C., *A Practical Guide to Splines*, Springer-Verlag, New York, 2001.
- ⁷⁷Franklin, G. F., Powell, J. D., and Enami-Naeini, A., *Feedback Control of Dynamic Systems*, 3rd Ed., Addison-Wesley Publishing Company, USA, 1994.
- ⁷⁸Franklin, G. F., Powell, J. D., and Workman, M. L., *Digital Control of Dynamic Systems*, Prentice Hall, USA, 1998.
- ⁷⁹Athans, M. and Falb, P. L., *Optimal Control: An Introduction to the Theory and Its Applications*, McGraw-Hill, NY, 1966.
- ⁸⁰Kirk, D. E., *Optimal Control Theory: An Introduction*, Prentice Hall, New Jersey, 1970.
- ⁸¹Bryson, A. E. and Ho, Y. C., *Applied Optimal Control*, Taylor & Francis Group, New York, 1975.
- ⁸²Stengel, R. F., *Optimal Control and Estimation*, Dover Publications, NY, 1994.
- ⁸³Zhou, K., Doyle, J. C., and Glover, K., *Robust and Optimal Control*, Prentice Hall, New Jersey, 1996.
- ⁸⁴Skogestad, S. and Postlethwaite, I., *Multivariable Feedback Control: Analysis and Design*, 2nd Ed., Wiley-Interscience, Great Britain, 2005.
- ⁸⁵Mayne, D. Q., Rawlings, J. B., Rao, C. V., and Sokaert, P. O. M., "Constrained Model Predictive Control: Stability and Optimality," *Automatica*, Vol. 36, No. 6, 2000.
- ⁸⁶Maciejowski, J. M., *Predictive Control with Constraints*, Prentice Hall, U.K., 2002.
- ⁸⁷Camacho, E. F. and Bordons, C., *Model Predictive Control Second Edition*, Springer-Verlag, London, 2007.
- ⁸⁸Shamma, J. S. and Athans, M., "Analysis of Gain Scheduled Control for Nonlinear Plants," *IEEE Transactions on Automatic Control*, Vol. 35, No. 8, 1990, pp. 898-907.
- ⁸⁹Shamma, J. S. and Athans, M., "Guaranteed properties of gain scheduled control for linear parameter-varying plants," *Automatica*, Vol. 27, No. 3, 1991, pp. 559-564.
- ⁹⁰Isidori, A., *Nonlinear Control Systems, third edition*, Springer-Verlag, London, 1995.
- ⁹¹Sastry, S. S., *Nonlinear Systems: Analysis, Stability, and Control*, Springer, NY, 1999.
- ⁹²Utkin, V. I., "Variable Structure Systems with Sliding Modes," *IEEE Transactions on Automatic Control*, Vol. 22, No. 2, 1977, pp. 212-222.
- ⁹³Utkin, V. I., Guldner, J., and Shi, J., *Sliding Mode Control in Electromechanical Systems*, Taylor - Francis Inc., Philadelphia, PA, 1999.
- ⁹⁴Perruquetti, W. and Barbot, J. P., *Sliding Mode Control in Engineering*, Marcel Dekker, NY, 2002.
- ⁹⁵Kokotovic, P. V., "The Joy of Feedback: Nonlinear and Adaptive," *IEEE Control Systems Magazine*, Vol. 12, No. 3, 1992, pp. 717.
- ⁹⁶Lozano, R. and Brogliato, B., "Adaptive Control of Robot Manipulators with Flexible Joints," *IEEE Transactions on Automatic Control*, Vol. 37, No. 2, 1992, pp. 174-181.
- ⁹⁷Fliess, M., "Generalized Controller Canonical Forms for Linear and Nonlinear Dynamics," *IEEE Transactions on Automatic Control*, Vol. 35, 1990, pp. 994-1001.
- ⁹⁸Fliess, M., Levine, J., Martin, P., and Rouchon, P., "Flatness and Defect of Nonlinear Systems: Introductory Theory and Examples," *International Journal of Control*, Vol. 61, No. 6, 1995, pp. 1327-1361.
- ⁹⁹Fliess, M., Lvine, J., Martin, P., and Rouchon, P., "A Lie-Backlund Approach to Equivalence and Flatness of Nonlinear Systems," *IEEE Transactions on Automatic Control*, Vol. 44, 1999, pp. 922-937.
- ¹⁰⁰Sira-Ramirez, H. and Agrawal, S. K., *Differentially Flat Systems*, Marcel Dekker Inc., 2004.
- ¹⁰¹Pearson, J. D., "Approximation Methods In Optimal Control," *Journal of Electronics and Control*, Vol. 13, 1962, pp. 453-469.
- ¹⁰²Wernli, A. and Cook, G., "Suboptimal Control For The Nonlinear Quadratic Regulator Problem," *Automatica*, Vol. 11, 1975, pp. 75-84.
- ¹⁰³Friedland, B., *Advanced Control System Design*, Prentice-Hall, Englewood Cliffs NJ, 1996.
- ¹⁰⁴Mracek, C. P. and Cloutier, J. R., "Control Designs For The Nonlinear Benchmark Problem Via The State-Dependent Riccati Equation Method," *International Journal of Robust and Nonlinear Control*, Vol. 8, 1998, pp. 401-433.
- ¹⁰⁵Cimen, T., "State-Dependent Riccati Equation (SDRE) Control: A Survey," *IFAC, 17th World Congress*, 2008.
- ¹⁰⁶Xin, M. and Balakrishnan, S. N., "A New Method for Suboptimal Control of a Class of Nonlinear Systems," *Optimal Control Applications and Methods*, Vol. 26, No. 3, 2005, pp. 55-83.
- ¹⁰⁷Taamallah, S., "A Flight Dynamics Helicopter UAV Model For A Single Pitch-Lag-Flap Main Rotor: Modeling & Simulations," Tech. Rep. NLR-TP-2011-286-PT-1, NLR, 2011.
- ¹⁰⁸Taamallah, S., "A Flight Dynamics Helicopter UAV Model For A Single Pitch-Lag-Flap Main Rotor: Model Extensions," Tech. Rep. NLR-TP-2011-286-PT-2, NLR, 2011.
- ¹⁰⁹Taamallah, S., "Small-Scale Helicopter Blade Flap-Lag Equations of Motion For A Flybarless Pitch-Lag-Flap Main Rotor (submitted for publication)," *AIAA Modeling and Simulation Technologies Conference*, 2011.

- ¹¹⁰Seckel, E. and Curtiss, H. C., "Aerodynamic Characteristics of Helicopter Rotors," Tech. Rep. No. 659, Department of Aerospace and Mechanical Engineering, Princeton University, 1962.
- ¹¹¹Chen, R. T. N., "Effects of Primary Rotor Parameters on Flapping Dynamics," Tech. Rep. NTP 1431, NASA Ames Research Center, 1980.
- ¹¹²Ellis, C. W., "Effects of Rotor Dynamics on Helicopter Automatic Control System Requirements," *Aeronautical Engineering Review*, 1953.
- ¹¹³Hall, W. E. and Bryson, A. E., "Inclusion of Rotor Dynamics in Controller Design for Helicopters," *AIAA Journal of Aircraft*, Vol. 10, No. 4, 1973, pp. 200–206.
- ¹¹⁴Miyajima, K., "Analytical Design of a High Performance Stability and Control Augmentation System for a Hingeless Rotor Helicopter," *Journal of the American Helicopter Society*, 1979.
- ¹¹⁵Chen, R. T. N. and Hindson, W. S., "Influence of High-Order Dynamics on Helicopter Flight Control System Bandwidth," *AIAA Journal of Guidance, Control, and Dynamics*, Vol. 9, No. 2, 1986, pp. 190–197.
- ¹¹⁶Curtiss, H. C., "Stability and Control Modeling," *12th European Rotorcraft Forum*, 1986.
- ¹¹⁷Brinson, P. R., "Towards Higher Bandwidth in Helicopter Flight Control Systems," *Royal Aeronautical Society Conference on Helicopter Handling Qualities and Control*, 1988.
- ¹¹⁸Curtiss, H. C., "Physical Aspects of Rotor Body Coupling in Stability and Control," *46th Annual Forum of the American Helicopter Society*, 1990.
- ¹¹⁹Miller, D. G. and White, F., "A Treatment of the Impact of Rotor-Fuselage Coupling on Helicopter Handling Qualities," *43rd Annual Forum of the American Helicopter Society*, 1987.
- ¹²⁰Tischler, M. B., "System Identification Requirements for High Bandwidth Rotorcraft Flight Control System Design," *AGARD LS-178 Rotorcraft System Identification*, 1991.
- ¹²¹Chen, R. T. N. and Hindson, W. S., "Influence of Dynamic Inflow on the Helicopter Vertical Response," Tech. Rep. NTM 88327, NASA Ames Research Center, 1986.
- ¹²²Chen, R. T. N., "A Survey of Nonuniform Inflow Models for Rotorcraft Flight Dynamics and Control Applications," Tech. Rep. NTM 102219, NASA Ames Research Center, 1989.
- ¹²³Kothmann, B. D., Lu, Y., DeBrun, E., and Horn, J., "Perspectives on Rotorcraft Aerodynamic Modeling for Flight Dynamics Applications," *4th Decennial Specialists Conference on Aeromechanics*, 2004.
- ¹²⁴Kunz, D. L., "Comprehensive Rotorcraft Analysis: Past, Present, and Future," *AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics & Materials Conference*, 2005.
- ¹²⁵van Hoydonck, W. R. M., Haverdings, H., and Pavel, M. D., "A Review of Rotorcraft Wake Modeling Methods for Flight Dynamics Applications," *35th European Rotorcraft Forum*, 2009.
- ¹²⁶Pitt, D. M. and Peters, D. A., "Theoretical Prediction of Dynamic-Inflow Derivatives," *6th European Rotorcraft Forum*, 1980.
- ¹²⁷Gaonkar, G. H. and Peters, D. A., "Effectiveness of Current Dynamic-Inflow Models in Hover and Forward Flight," *Journal of the American Helicopter Society*, Vol. 31, No. 2, 1986.
- ¹²⁸Peters, D. A. and HaQuang, N., "Technical Notes - Dynamic Inflow for Practical Applications," *Journal of the American Helicopter Society*, 1988, pp. 64–68.
- ¹²⁹Gaonkar, G. H. and Peters, D. A., "Review of Dynamic Inflow Modeling for Rotorcraft Flight Dynamics," *Vertica*, 1988, pp. 213–242.
- ¹³⁰Peters, D. A., Boyd, D. D., and He, C. J., "Finite-State Induced-Flow Model for Rotors in Hover and Forward Flight," *Journal of the American Helicopter Society*, 1989, pp. 5–17.
- ¹³¹Peters, D. A. and He, C. J., "Correlation of Measured Induced Velocities with a Finite-State Wake Model," *Journal of the American Helicopter Society*, Vol. 36, No. 3, 1991.
- ¹³²Peters, D. A. and He, C. J., "Finite State Induced Flow Models Part II: Three-Dimensional Rotor Disk," *AIAA Journal of Aircraft*, Vol. 32, No. 2, 1995, pp. 323–333.
- ¹³³Hamers, M. and Basset, P. M., "Application of the Finite State Unsteady Wake Model in Helicopter Flight Dynamic Simulation," *26th European Rotorcraft Forum*, 2000.
- ¹³⁴Keller, J. D., "An Investigation of Helicopter Dynamic Coupling Using an Analytical Model," *Journal of the American Helicopter Society*, Vol. 41, No. 4, 1996, pp. 322–330.
- ¹³⁵Prasad, J. V. R., Zhao, J., and Peters, D. A., "Modeling of Rotor Dynamic Wake Distortion During Maneuvering Flight," *AIAA Atmospheric Flight Mechanics Conference*, 2001.
- ¹³⁶Ballin, M. G. and Dalang-Secrtan, M. A., "Validation of the Dynamic Response of a Blade-Element UH-60 Simulation Model in Hovering Flight," *46th Forum of the American Helicopter Society*, 1990.
- ¹³⁷von Grunhagen, W., "Dynamic Inflow Modeling for Helicopter Rotors and Its Influence on the Prediction of Cross-Couplings," *AHS Aeromechanics Specialists Conference*, 1995.
- ¹³⁸Takahashi, M. D., Fletcher, J. W., and Tischler, M. B., "Development of a Model Following Control Law for Inflight Simulation Using Analytical and Identified Models," *51st Forum of the American Helicopter Society*, 1995.
- ¹³⁹Mansur, M. H. and Tischler, M. B., "An Empirical Correction Method for Improving off-Axes Response Prediction in Component Type Flight Mechanics Helicopter Models," Tech. Rep. TM 110406, NASA Ames Research Center, 1997.
- ¹⁴⁰Fletcher, J. W. and Tischler, M. B., "Improving Helicopter Flight Mechanics Models with Laser Measurements of Blade Flapping," *53rd Annual Forum of the American Helicopter Society*, 1997.
- ¹⁴¹Tischler, M. B., "Identification of Bearingless Main Rotor Dynamic Characteristics from Frequency-Response Wind-Tunnel Test Data," *Journal of the American Helicopter Society*, 1999.
- ¹⁴²Schulein, G. J., Tischler, M. B., Mansur, M. H., and Rosen, A., "Validation of Cross-Coupling Modeling Improvements for UH-60 Flight Mechanics Simulations," *Journal of the American Helicopter Society*, Vol. 47, No. 3, 2002, pp. 209–213.

- ¹⁴³Curtiss, H. C., "Aerodynamic Models and the Off-Axis Response," *55th Annual Forum of the American Helicopter Society*, 1999.
- ¹⁴⁴Arnold, U. T. P., Keller, J. D., Curtiss, H. C., and Reichert, G., "The Effect of Inflow Models on the Predicted Response of Helicopters," *Journal of the American Helicopter Society*, 1998, pp. 25–36.
- ¹⁴⁵Rosen, A. and Isser, A., "A New Model of Rotor Dynamics During Pitch and Roll of a Hovering Helicopter," *Journal of the American Helicopter Society*, 1995.
- ¹⁴⁶Theodore, C. and Celi, R., "Prediction of the Off-Axis Response to Cyclic Pitch Using a Maneuvering Free Wake Model," *25th European Rotorcraft Forum*, 1999.
- ¹⁴⁷Bagai, A., Leishman, J. G., and Park, J., "A Free-Vortex Rotor Wake Model for Maneuvering Flight," *AHS Technical Specialist Meeting on Rotorcraft Acoustics and Aerodynamics*, 1997.
- ¹⁴⁸Basset, P. M., "Modeling of the Dynamic Inflow on the Main Rotor and the Tail Components in Helicopter Flight Mechanics," *22nd European Rotorcraft Forum*, 1996.
- ¹⁴⁹Basset, P. M. and Tchen-Fo, F., "Study of the Rotor Wake Distortion Effects on the Helicopter Pitch-Roll Cross-Couplings," *24th European Rotorcraft Forum*, 1998.
- ¹⁵⁰Basset, P. M. and Elomari, A., "A Rotor Vortex Wake Model For Helicopter Flight Mechanics and its Applications to the Prediction of the Pitch-Up Phenomena," *25th European Rotorcraft Forum*, 1999.
- ¹⁵¹Barocela, E., Peters, D. A., and Krothapalli, K. R., "The Effect of Wake Distortion on Rotor Inflow Gradients and Off-Axis Coupling," *AIAA Atmospheric Flight Mechanics Conference*, 1997.
- ¹⁵²Krothapalli, K. R., Prasad, J. V. R., and Peters, D. A., "Development of a Comprehensive Wake Theory for Lifting Rotors," *AIAA Atmospheric Flight Mechanics Conference*, 1996.
- ¹⁵³Krothapalli, K. R., Prasad, J. V. R., and Peters, D. A., "Helicopter Rotor Dynamic Inflow Modeling for Maneuvering Flight," *Journal of the American Helicopter Society*, 2001, pp. 129–139.
- ¹⁵⁴Zhao, J., Prasad, J. V. R., and Peters, D. A., "Rotor Dynamic Wake Distortion Model for Helicopter Maneuvering Flight," *Journal of the American Helicopter Society*, 2004, pp. 414–424.
- ¹⁵⁵Zhao, J., *Dynamic Wake Distortion Model for Helicopter Maneuvering Flight*, Ph.D. thesis, Georgia Institute of Technology, 2005.
- ¹⁵⁶He, C., Lee, C. S., and Chen, W., "Rotorcraft Simulation Model Enhancement to Support Design, Testing and Operational Analysis," *Journal of the American Helicopter Society*, 2000, pp. 284–292.
- ¹⁵⁷Prasad, J. V. R., Fanciullo, T., Zhao, J., and Peters, D. A., "Towards a High Fidelity Inflow Model for Maneuvering and In-Ground Effect Flight Simulation," *57th Annual Forum of the American Helicopter Society*, 2001.
- ¹⁵⁸Leishman, G. J., *Principles of Helicopter Aerodynamics*, Cambridge University Press, Cambridge, UK, 2000.
- ¹⁵⁹Xin, H., Prasad, J. V. R., and Peters, D. A., "Unsteady Aerodynamics of Helicopter Rotor Hovering in Dynamic Ground Effect," *AIAA Atmospheric Flight Mechanics Conference*, 1998.
- ¹⁶⁰Xin, H., Prasad, J. V. R., and Peters, D. A., "Dynamic Inflow Modeling for Simulation of a Helicopter Operating in Ground Effect," *AIAA Modeling and Simulation Technologies Conference*, 1999.
- ¹⁶¹Xin, H., Prasad, J. V. R., Peters, D. A., Itoga, N., Iboshi, N., and Nagashima, T., "Ground Effect Aerodynamics of Lifting Rotors Hovering Above Inclined Ground Plane," *AIAA Applied Aerodynamics Conference*, 1999.
- ¹⁶²Itoga, N., Iboshi, N., Nagashima, T., Prasad, J. V. R., Xin, H., and Peters, D. A., "A New Numerical Method for Predicting Aero-Mechanical Behaviors of a Rotor Hovering at Close Proximity to Inclined Flat Surface," *55th Annual Forum of the American Helicopter Society*, 1999.
- ¹⁶³Xin, H., Prasad, J. V. R., and Peters, D. A., "An Analysis of Partial Ground Effect on the Aerodynamics of a Helicopter Rotor," *AIAA Aerospace Sciences Meeting*, 2000.
- ¹⁶⁴Sheridan, P. F. and Smith, R. P., "Interactional Aerodynamics A New Challenge to Helicopter Technology," *Journal of the American Helicopter Society*, 1980, pp. 3–21.
- ¹⁶⁵Jenkins, J. L., "Trim Requirements and Static Stability Derivatives from a Wind-Tunnel Investigation of a Lifting Rotor in Transition," Tech. Rep. TN D-2655, NASA Langley Research Center, 1965.
- ¹⁶⁶DuWaldt, F. A., "Wakes of Lifting Propellers (Rotors) in Ground Effect," Tech. Rep. BB-1665-5-3, Cornell Aeronautical Laboratory, 1966.
- ¹⁶⁷Heyson, H. H., "Theoretical Study of Conditions Limiting V/STOL Testing in Wind Tunnels with Solid Floor," Tech. Rep. TN D-5819, NASA Langley Research Center, 1970.
- ¹⁶⁸Gao, Z. and He, C. J., "A Study of the Rotor Wake in Nap-Of-the Earth," *Journal of Nanjing Aeronautical Institute*, Vol. 7, No. 4, 1986.
- ¹⁶⁹Sheridan, P. F. and Wiesner, W., "Aerodynamics of helicopter flight near the ground," *33rd Forum of the American Helicopter Society*, 1977.
- ¹⁷⁰Curtiss, H. C., Sun, M., Putman, W. F., and Hanker, E. J., "Rotor Aerodynamics in Ground Effect at Low Advance Ratios," *Journal of the American Helicopter Society*, 1984, pp. 48–55.
- ¹⁷¹Curtiss, H. C., Erdman, W., and Sun, M., "Ground Effect Aerodynamics," *Vertica*, Vol. 11, No. 1, 1987, pp. 29–42.
- ¹⁷²Hess, R. A., "Rotorcraft Handling Qualities in Turbulence," *AIAA Journal of Guidance, Control, and Dynamics*, Vol. 18, No. 1, 1995, pp. 39–45.
- ¹⁷³Vorontsov, P. A., "Turbulence and Vertical Currents in the Boundary Layer of the Atmosphere," Tech. rep., Translated by USAF Foreign Technology Division, 1969, 1966.
- ¹⁷⁴Press, H., Meadows, M. T., and Hadlock, I., "Estimates of Probability Distribution of Root-Mean-Square Gust Velocity of Atmospheric Turbulence from Operational Gust Load Data by Random Process Theory," Tech. Rep. TN 3362, NACA, 1953.
- ¹⁷⁵von Karman, T., *Progress in the Statistical Theory of Turbulence*, Turbulence: Classical Papers in Statistical Theory, Interscience Publishers, NY, 1961.

- ¹⁷⁶Gault, J. D. and Gunter, D. E., "Atmospheric Turbulence Considerations for Future Aircraft Designed to Operate at Low Altitudes," *AIAA Journal of Aircraft*, 1968.
- ¹⁷⁷Anonymous, "Flying Qualities of Piloted Airplanes," Tech. Rep. MIL-F-8785C, United States DoD, 1980.
- ¹⁷⁸Gerlach, O. B., van de Moesdijk, G., and van der Vaart, J. C., "Progress in the Mathematical Modelling of Flight in Turbulence," *AGARD Conference Proceedings on Flight in Turbulence*, 1973.
- ¹⁷⁹Beal, T. R., "Digital Simulation of Atmospheric Turbulence for Dryden and von Karman Models," *AIAA Journal of Guidance, Control, and Dynamics*, Vol. 16, No. 1, 1993.
- ¹⁸⁰Riaz, J., *A Simulation Model of Atmospheric Turbulence for Rotorcraft Applications*, Ph.D. thesis, Georgia Institute of Technology, 1992.
- ¹⁸¹Riaz, J., Prasad, J. V. R., Schrage, D. P., and Gaonkar, G. H., "Technical Notes - Atmospheric Turbulence Simulation for Rotorcraft Applications," *Journal of the American Helicopter Society*, 1993, pp. 84-88.
- ¹⁸²Zbrozek, J. K., "Atmospheric Gusts - Present State of the Art and Further Research," *Journal of the Royal Aeronautical Society*, Vol. 69, 1965, pp. 27-44.
- ¹⁸³Priestly, M. B., "Evolutionary Spectra and Nonstationary Processes," *Journal of the Royal Statistical Society*, , No. 2, 1965.
- ¹⁸⁴Howell, L. J. and Lin, Y. K., "Response of Flight Vehicles to Nonstationary Atmospheric Turbulence," *AIAA Journal*, Vol. 9, No. 11, 1971.
- ¹⁸⁵Houbolt, J. C., "Atmospheric Turbulence," *AIAA Journal*, Vol. 11, 1973, pp. 421-437.
- ¹⁸⁶Etkin, B., "Turbulent Wind and Its Effect on Flight," *AIAA Journal of Aircraft*, Vol. 18, No. 3, 1981, pp. 327-345.
- ¹⁸⁷Elliott, A. S. and Chopra, I., "Helicopter Response to Atmospheric Turbulence in Forward Flight," *Journal of the American Helicopter Society*, 1990, pp. 51-59.
- ¹⁸⁸Gaonkar, G. H. and Hohenemser, K. H., "Stochastic Properties of Turbulence Excited Rotor Blade Vibrations," *AIAA*, 1971.
- ¹⁸⁹Gaonkar, G. H., "Review of Nonstationary Gust Responses of Flight Vehicles," *21st AIAA/AHS/ASME Structures, Structural Dynamics and Materials Conference*, 1980.
- ¹⁹⁰Gaonkar, G. H., "Review of Turbulence Modeling and Related Applications to Some Problems of Helicopter Flight Dynamics," *Journal of the American Helicopter Society*, 2007.
- ¹⁹¹Bir, G. S. and Chopra, I., "Gust Response of Hingeless Rotors," *41st Annual Forum of the American Helicopter Society*, 1984.
- ¹⁹²Bir, G. S. and Chopra, I., "Gust Response of Hingeless Rotors," *Journal of the American Helicopter Society*, Vol. 31, No. 2, 1986.
- ¹⁹³Bir, G. S. and Chopra, I., "Prediction of Blade Stresses Due to Gust Loading," *Vertica*, Vol. 10, No. 3, 1986.
- ¹⁹⁴Wan, F. Y. M. and Lakshmikantham, C., "Blade Response to Random Loads: A Direct Time-Domain Approach," *AIAA Journal*, 1973, pp. 24-28.
- ¹⁹⁵Gaonkar, G. H. and Hohenemser, K. H., "Stochastic Properties of Turbulence Excited Rotor Blade Vibrations," *AIAA Journal*, Vol. 9, 1971, pp. 419-424.
- ¹⁹⁶Lin, Y. K. and Fujimori, Y., "Rotor Blade Stability in Turbulent Flows - Part I," *AIAA Journal*, Vol. 17, No. 6, 1979, pp. 545-552.
- ¹⁹⁷Fujimori, Y., Lin, Y. K., and Ariaratnam, S. T., "Rotor Blade Stability in Turbulent Flows - Part II," *AIAA Journal*, Vol. 17, No. 7, 1979, pp. 673-678.
- ¹⁹⁸Prussing, J. E. and Lin, Y. K., "Rotor Blade Flap-Lag Stability in Turbulent Flows," *Journal of the American Helicopter Society*, 1982, pp. 51-57.
- ¹⁹⁹Lin, Y. K. and Prussing, J. E., "Technical Notes Concepts of Stochastic Stability in Rotor Dynamics," *Journal of the American Helicopter Society*, Vol. 27, No. 2, 1982, pp. 73-74.
- ²⁰⁰Prussing, J. E. and Lin, Y. K., "A Closed-Form Analysis of Rotor Blade Flap-Lag Stability in Hover and Low-Speed Forward Flight in Turbulent Flow," *AIAA 24th Structures, Structural Dynamics and Materials Conference*, 1983.
- ²⁰¹Prussing, J. E., Lin, Y. K., and Shiau, T. N., "Rotor Blade Flap-Lag Stability and Response in Forward Flight in Turbulent Flows," *Journal of the American Helicopter Society*, 1984, pp. 82-87.
- ²⁰²Riaz, J., Prasad, J. V. R., Schrage, D. P., and Gaonkar, G. H., "Helicopter Response to Atmospheric Turbulence," *48th Annual Forum of the American Helicopter Society*, 1992.
- ²⁰³Prasad, J. V. R., Riaz, J., Gaonkar, G. H., and Dang, Y. Y., "Real Time Implementation Aspects of a Rotorcraft Turbulence Simulation Method," *49th Annual Forum of the American Helicopter Society*, 1993.
- ²⁰⁴George, V. V., Gaonkar, G. H., Prasad, J. V. R., and Schrage, D. P., "Adequacy of Modeling Turbulence and Related Effects on Helicopter Response," *AIAA Journal*, Vol. 30, No. 6, 1992, pp. 1468-1479.
- ²⁰⁵Costello, M., Gaonkar, G. H., Prasad, J. V. R., and Schrage, D. P., "Technical Notes - Some Issues on Modeling Atmospheric Turbulence Experienced by Helicopter Rotor Blades," *Journal of the American Helicopter Society*, 1992, pp. 71-75.
- ²⁰⁶Dang, Y. Y., Subramanian, S., and Gaonkar, G. H., "Modeling Turbulence Seen by Multibladed Rotors for Predicting Rotorcraft Response with Three-Dimensional Wake," *Journal of the American Helicopter Society*, 1997, pp. 337-349.
- ²⁰⁷Boiffier, J. L., *The Dynamics of Flight The Equations*, John Wiley & Sons, Chichester, England, 1998.
- ²⁰⁸Misra, P. and Enge, P., *Global Positioning System: Signals, Measurements and Performance, Second Edition*, Ganga-Jamuna Press, Lincoln MA, USA, 2006.
- ²⁰⁹Gessow, A. and Myers, G. C., *Aerodynamics of the Helicopter*, College Park Pr, 1999.
- ²¹⁰Johnson, W., *Helicopter Theory*, Dover Publications Inc., NY, USA, 1994.
- ²¹¹Bramwell, A. R. S., *Bramwell's Helicopter Dynamics, Second Edition*, AIAA Inc., Reston VA, USA, 2001.
- ²¹²Shevell, R. S., *Fundamentals of Flight*, Prentice Hall, Upper Saddle River NJ, 1989.

- ²¹³Anderson, J. D., *Fundamentals of Aerodynamics. Third Ed.*, McGraw-Hill Higher Education, NY, 2001.
- ²¹⁴Wells, D. A., *Lagrangian Dynamics*, McGraw-Hill Co., 1967.
- ²¹⁵Kahaner, D., Moler, C., and Nash, S., *Numerical Methods and Software*, Prentice-Hall, NJ, USA, 1989.
- ²¹⁶Stoer, J. and Bulirsch, R., *Introduction to Numerical Analysis*, Springer-Verlag, 2002.
- ²¹⁷Peters, D. A. and He, C., "Technical Note: Modification of Mass-Flow parameter to Allow Smooth Transition Between Helicopter and Windmill States," *Journal of the American Helicopter Society*, 2006, pp. 275–278.
- ²¹⁸Jimenez, J., Desopper, A., Taghizad, A., and Binet, L., "Induced Velocity Model in Steep Descent and Vortex Ring State Prediction," *27th European Rotorcraft Forum*, 2001.
- ²¹⁹Hamers, M. and von Grunhagen, W., "Nonlinear Helicopter model Validation Applied to Realtime Simulations," *53rd Annual Forum of the American Helicopter Society*, 1997.
- ²²⁰Bailey, F. J., "A Simplified Theoretical Method of Determining the Characteristics of a Lifting Rotor in Forward Flight," Tech. Rep. RNo. 716, NACA, 1941.
- ²²¹ART, *FLIGHTLAB Theory Manual (Vol. One & Two)*, Advanced Rotorcraft Technology, Inc., Mountain View CA, 2006.
- ²²²Voorsluijs, G. M., "A Modular Generic Helicopter Model," Tech. rep., Master Thesis, Delft University of Technology, 2002.
- ²²³MathWorks, <http://www.mathworks.com/>, Natick MA., U.S.A.
- ²²⁴Peters, D. A., Chouchane, M., and Fulton, M., "Helicopter Trim with Flap-Lag-Torsion and Stall by an Optimized Controller," *AIAA Journal of Guidance*, Vol. 13, No. 5, 1990.
- ²²⁵Peters, D. A. and Barwey, D., "A General Theory of Rotorcraft Trim," *AIAA*, 1995.
- ²²⁶Achar, N. S. and Gaonkar, G. H., "Helicopter Trim Analysis by Shooting and Finite Element Methods with Optimally Damped Newton Iterations," *AIAA Journal*, Vol. 31, No. 2, 1993.
- ²²⁷Peters, D. A. and Kim, B. S., "Control Settings for a Trimmed Stalled Rotor by an Automatic Feedback System," *AIAA*, 1981.
- ²²⁸Peters, D. A. and Izadpanah, A. P., "Helicopter Trim by Periodic Shooting with Newton-Raphson Iteration," *37th Annual Forum of the American Helicopter Society*, 1981.
- ²²⁹Kim, F. D., Celi, R., and Tischler, M. B., "Forward Flight Trim and Frequency Response Validation of a Helicopter Simulation Model," *Journal of Aircraft*, Vol. 30, No. 6, 1993.
- ²³⁰McVicar, J. S. G. and Bradley, G., "Engineering Notes - Robust and Efficient Trimming Algorithm for Application to Advanced Mathematical Models of Rotorcraft," *AIAA Journal of Aircraft*, Vol. 32, No. 2, 1995.
- ²³¹AviationToday, *Ask Ray Prouty: Gross Weights Effect on Autorotation*, Danbury CT., U.S.A., 2007.
- ²³²Blake, B. B. and Alansky, I. B., "Stability and Control of the YUH-61A," *31st Forum of the American Helicopter Society*, 1975.
- ²³³He, C., Lee, C. S., and Chen, W., "Technical Notes - Finite State Induced Flow model in Vortex Ring State," *Journal of the American Helicopter Society*, 2000, pp. 318–320.